



Installation and Administration Guide

Version 1.3

To use with OCS Inventory NG Release Candidate 1 or higher

OpenSource, Web enabled Inventory System
<http://ocsinventory.sourceforge.net>

Table of Contents

1	Introduction.	5
2	Important notes	6
3	Setting up management server.	7
3.1	Under Linux Operating System.	8
3.1.1	Requirements.	8
3.1.2	Installing Web administration server.	8
3.1.3	Installing Web communication server.	9
3.1.4	Configuring management server.	13
3.1.5	Upgrading management server.	16
3.2	Under Windows Operating System.	17
3.2.1	Installing management server.	18
3.2.2	Configuring management server.	24
3.2.3	Updating security of XAMPP components.	27
3.2.4	Upgrading management server.	34
4	Setting up agent on client computers.	38
4.1	Under Windows Operating Systems.	38
4.1.1	Deploying the agent through login script.	38
4.1.2	Installing the agent manually on a non network connected computer.	40
4.1.3	Agent's command line switches	42
4.2	Under Linux Operating Systems.	43
4.2.1	Installing the agent on a network connected computer.	45
4.2.2	Installing the agent on a non network connected computer.	47
4.2.3	Agent's command line switches	49
5	Administration of OCS Inventory NG.	50
5.1	Managing OCS Inventory NG Administration server users.	50
5.2	Managing OCS Inventory NG general options.	51
5.3	Using Registry Query feature.	52
5.4	Managing duplicates computers.	54
5.5	Editing administrative information.	56
5.6	Editing the label	58
5.7	Deploying automatically a new release of agent.	59
5.8	Importing inventory for non network connected computers.	60
5.8.1	With Administration server through your web browser	60
5.8.2	With Communication server through a Perl script	61
5.9	Using IP discovery feature.	62
5.9.1	Introduction.	62
5.9.2	How does it work ?	63
5.9.3	Working with results.	64
5.9.4	Enhancing IPDISCOVERY using ipdiscover-util perl script.	71
6	Querying inventory results.	76
6.1	All computers.	76
6.2	TAG / number of PC repartition.	77
6.3	Search with various criteria.	78
7	Management server tuning.	81
8	Common errors	82
8.1	MySQL errors.	82

8.1.1	Max_allowed_packet error	82
8.1.2	Client does not support authentication protocol.	83
8.2	PHP errors	84
8.2.1	Requested content-length	84
8.2.2	ZIP support	85
8.3	Apache web server	86
8.3.1	Files and directories permissions under Linux.	86

History and changes

Version	Date	Author	Comments
1.0	2005-06-22	Didier LIROULET	Creation
1.1	2005-08-18	Didier LIROULET	Updates for management server installation on Linux considering the version of mod_perl and for management server installation on Windows, ipdiscover feature.
1.2	2005-09-05	Didier LIROULET	Updates for IP Discover utility, and agent including monitor serial number detection, force not using proxy or force using HTTP port other than 80. Added chapter for common errors.
1.3	2005-12-03	Didier LIROULET	Updates for NG 1.0 RC 1. Deployment of Windows Agent 4010 requires use of OcsLogon. Linux agent v8 requires PERL module Net::IP and update of ipdiscover module. Subnets are now managed in database (not in file subnet.csv). Upgrade of Windows Server require reinstall.

1 Introduction.

Open Computer and Software Inventory Next Generation is an application designed to help a network or system administrator keep track of the computer configuration and software installed on the network.

Dialog between client computers and management server is based on actual standards, HTTP protocol and XML data formatting.

Management server runs on Apache/MySQL/PHP/PERL server, under Linux or Windows NT based computers.

Inventoried client computers can run Microsoft Windows 95/98/Me/NT4/2000/XP/2003 or Linux operating systems.

OCS Inventory is GPL software, i.e. free to use & copy (see the [GPL](#) or <http://www.opensource.org>). OCS Inventory is also Open Source! This means if you want to modify the sources you can! But if you want update the source code to distribute it, you must provide your updates under GPL license terms.

OCS Inventory supports the following languages:

- ✓ Brazilian Portuguese
- ✓ English
- ✓ French
- ✓ German
- ✓ Spanish

Used with park management software such as [GLPI](#) (<http://glpi.indepnet.org/>), you will have a powerful inventory and park management software with automatic updates of computer configuration, license management, help desk and more.

2 Important notes

OCS Inventory NG 1.0 RC1 includes most of requested features, and a lot of bug fixes (See “changelog” or “readme” of each packages).

But also, take care about the following points.

OCS Inventory NG Server for Linux.

- All previous packages for Communication Server, Administration Server and IPDISCOVER-UTIL perl script are now included in OCSNG_LINUX_SERVER package.
- Administration Server now requires ZIP support for PHP to be enabled.
- IPDISCOVER-UTIL perl script now uses Net::IP perl module, instead of Inline.pm module.

OCS Inventory NG Server for Windows.

- Now based on XAMPP 1.5.0 p11, instead of 1.4.14.
- Upgrade from previous version is not trivial, read carefully § 3.2.4 Upgrading management server.

OCS Inventory NG Agent for Windows.

- Deployment can only be done using launcher OcsLogon.exe, or manually. You cannot use automatic deployment feature.

OCS Inventory NG Agent for Linux.

- Now requires Net::IP perl module. Use automatic deployment feature carefully. If Net::IP is not setup on client computer, agent will not work !
- Includes new release of “ipdiscover” binary file. See § 4.2.

3 Setting up management server.

Management server contains 3 main components:

1. Database server, which store inventory information
2. Communication server, which will handle HTTP communications between database server and agents.
3. Administration server, which will allow administrators to query the database server through their favorite browser.

These 3 components can be hosted on a single computer or on different computers to allow load balancing. For more than 5000 inventoried computers, it's better to use at least 2 different servers, one for the database server and the other for the Communication server and Administration server.

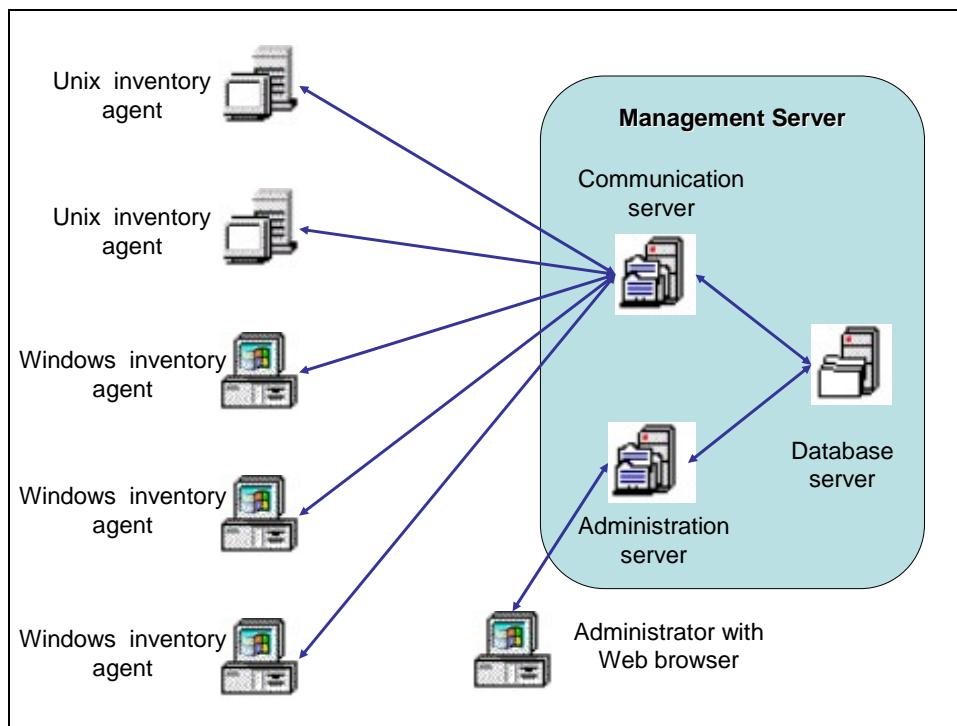


Figure 1 : OCS Inventory NG communication architecture.

NB: If you want to use multiple servers to host OCS inventory NG management server, we recommend that you setup it on Linux computers. OCS Inventory NG server for Windows comes as an integrated package containing all required components (apache, perl, php, mod_perl, mysql...).

Database server actually can only be MySQL 4.1 or higher, but we plan to support PostgreSQL.

Communication server needs Apache Web Server 1.3.X/2.X and is written in PERL as an Apache module. Why? Because PERL script is compiled when Apache starts, and not at each request. This is better for performance issue. Communication server may require some additional PERL module, depending your distribution.

Administration server is written in PHP 4 (or higher) and runs under Apache Web Server 1.3.X/2.X (but may run under other web servers). Administration requires ZIP capabilities enabled in PHP in order to use automatic deployment updates.

3.1 Under Linux Operating System.

We assume that you have:

- ✓ MySQL database server running somewhere and listening on default port 3306 with TCP/IP communication enabled.
- ✓ Apache Web server installed and running for Communication server and Administration server.
- ✓ PHP and Perl installed and usable by Apache Web server for the Administration server.
- ✓ Perl and mod_perl installed and usable by Apache Web server for the Communication server.

3.1.1 Requirements.

- ✓ Apache version 1.3.33 or higher / Apache version 2.0.46 or higher
 - ❖ Mod_perl version 1.29 or higher
 - ❖ Mod_php version 4.3.2 or higher
- ✓ PHP 4.3.2 or higher, with ZIP support enabled.
- ✓ PERL 5.6 or higher
 - ❖ Perl module XML::Simple version 2.13-1 or higher
 - ❖ Perl module Compress::Zlib version 1.34-1 or higher
 - ❖ Perl module DBI version 1.46-5 or higher
 - ❖ Perl module DBD::Mysql version 2.9003-3 or higher
 - ❖ Perl module Apache::DBI version 0.94-2 or higher
- ✓ MySQL version 4.1.7 or higher

3.1.2 Installing Web administration server.

The Web administration server requires Apache web server and PHP 4 scripting language (see § 3.1.1 Requirements.).

You must have root privileges to setup Administration server.

Download “OCS-NG_LINUX_SERVER_1.0-XX.tar.gz” from OCS Inventory Web Site (where XX is the last release version, like 1.0-RC1).

Unpack it.

✓ tar -xvzf OCSNG_LINUX_SERVER_1.0-XX.tar.gz

Move or copy extracted directory “OCSNG_LINUX_SERVER_1.0-XX/ocsreports” to the web server document root directory, usually “/var/www/html”.

✓ mv OCS-NG_LINUX_SERVER_1.0-XX/ocsreports /var/www/html

Ensure ownership and permissions on files are fine (see § 8.3.1 Files and directories permissions under Linux.).

✓ cd /var/www/html
✓ chown -R root:root ocsreports
✓ chmod g+rx ocsreports ocsreports/css ocsreports/files ocsreports/image ocsreports/languages

Add write permissions for Apache server account to “ocsreports” folder to allow configuration of administrative interface, use of IPDISCOVER utility, and importing new release of agents. For this, we will change group ownership of directory “ocsreports” to Apache server account, a let him write files (you can find group name of Apache server account in Apache configuration file “httpd.conf”, usually located in directory “/etc/httpd/conf”, by searching directive “Group”).

✓ chown root:apache ocsreports
✓ chmod g+w ocsreports

3.1.3 Installing Web communication server.

The Web communication server requires Apache web server and Perl 5 scripting language and some additional modules for Perl 5 (see § 3.1.1 Requirements.). It act as an Apache module which handle HTTP requests of OCS Inventory agents to a virtual directory “/ocsinventory”.

You must have root privileges to setup Administration server.

Download from <http://search.cpan.org> the following Perl modules:

✓ XML-Simple-2.14.tar.gz
✓ Compress-Zlib-1.34.tar.gz
✓ DBI-1.48.tar.gz
✓ DBD-mysql-2.9008.tar.gz
✓ Apache-DBI-0.94.tar.gz

Install XML::Simple module.

- ✓ tar -xvzf XML-Simple-2.14.tar.gz
- ✓ cd XML-Simple-2.14
- ✓ perl Makefile.PL
- ✓ make
- ✓ make test
- ✓ make install

Install Compress::Zlib module.

- ✓ tar -xvzf Compress-Zlib-1.34.tar.gz
- ✓ cd Compress-Zlib-1.34
- ✓ perl Makefile.PL
- ✓ make
- ✓ make test
- ✓ make install

Install DBI module.

- ✓ tar -xvzf DBI-1.48.tar.gz
- ✓ cd DBI-1.48
- ✓ perl Makefile.PL
- ✓ make
- ✓ make test
- ✓ make install

Install BDB::mysql module.

- ✓ tar -xvzf DBD-mysql-2.9008.tar.gz
- ✓ cd DBD-mysql-2.9008
- ✓ perl Makefile.PL
- ✓ make
- ✓ make test
- ✓ make install

Install Apache::DBI module.

- ✓ tar -xvzf Apache-DBI-0.94.tar.gz
- ✓ cd Apache-DBI-0.94
- ✓ perl Makefile.PL
- ✓ make
- ✓ make test
- ✓ make install

If not already done, download “OCSNG_LINUX_SERVER_1.0-XX.tar.gz” from OCS Inventory Web Site (where XX is the last release version, like 1.0-RC1).

Unpack it.

- ✓ tar -xvzf OCSNG_LINUX_SERVER_1.0-XX.tar.gz

Ensure ownership and permissions on files are fine (see § 8.3.1 Files and directories permissions under Linux.).

- ✓ chown -R root:root OCSNG_LINUX_SERVER_1.0-XX/ocsinventory-NG
- ✓ chmod gou+rx OCSNG_LINUX_SERVER_1.0-XX/ocsinventory-NG

Move or copy extracted directory “ocsinventory-NG” to a directory of your server. Usually local applications are added into “/usr/local” directory.

- ✓ mv OCSNG_LINUX_SERVER_1.0-XX/ocsinventory-NG /usr/local

Now, you have to configure communication server to work with your database server, and some other minor configuration.

If you are using mod_perl version 1.999.22 or higher, you must replace existing perl module “Ocsinventory.pm” of directory “ocsinventory-NG” by the one provided in directory “OCS-NG_LINUX_SERVER_1.0XX/Ocsinventory.pm_4_mp_since_1.999_22”.

- ✓ mv OCSNG_LINUX_SERVER_1.0-XX/Ocsinventory.pm_4_mp_since_1.999_22/Ocsinventory.pm /usr/local/ocsinventory-NG

NB: You can check which version of mod_perl you're using by querying the software database of your server.

Under RPM enabled Linux distribution (RedHat/Fedora, Mandriva...), run “rpm -q mod_perl”.

Under DPKG enabled Linux distribution (Debian, Unbuttu...), run “dpkg -l libapache-mod-perl*”.*

Go to the installation directory.

- ✓ cd /usr/local/ocsinventory-NG

By default, communication server assumes that installation directory is “/var/www/ocsinventory-NG”. You may have to change this setting in file “Ocsinventory_startup.pl” and in Apache directive file.

- ✓ vi Ocsinventory_startup.pl
- ✓ Update line <use lib “/var/www/ocsinventory-NG”;> to the value <use lib “/usr/local/ocsinventory-NG”;> in the file.

```
#!/usr/bin/perl
#####
##OCS inventory-NG Version 1.0 Beta
##Copyleft Pascal DANEK 2005
##Web : http://ocsinventory.sourceforge.net
##
##This code is open source and may be copied and modified as long as the source
##code is always made freely available.
##Please refer to the General Public Licence http://www.gnu.org/ or Licence.txt
#####
#
#Apache startup script
use lib "/usr/local/ocsinventory-NG";# <= Change this if Ocsinventory.pm is in an other
place
use XML::Simple;
use Compress::Zlib;
use Apache::DBI;
use DBI;
1;
```

Figure 2: Ocsinventory_startup.pl sample file

- ✓ vi apache_config
- ✓ Update line <PerlRequire /var/www/ocsinventory-NG/Ocsinventory_startup.pl> to the value <PerlRequire /usr/local/ocsinventory-NG/Ocsinventory_startup.pl> in the file.

Copy Apache configuration file to apache configuration directory if you use “include” directive in your httpd.conf (usually “/etc/httpd/conf.d” directory), or copy content of apache_config and paste it to httpd.conf file, (usually “/etc/httpd/conf/httpd.conf” file).

- ✓ cp apache_config /etc/httpd/conf.d/ocsinventory-ng.conf

NB: If you wish to use another computer for hosting the database, you have to update constant “DBHOST” in the file to specify address of database server. Also, if you do not wish to use default MySQL user “ocs” with password “ocs” created during the configuration process (see § 3.1.4 Configuring management server.), you must update constants “DBUSER” and “DBPWD”.

```
#ocsinventory-ng configuration
PerlRequire /usr/local/ocsinventory-NG/Ocsinventory_startup.pl
<Location /ocsinventory>
    order deny,allow
    allow from all
    SetHandler perl-script
    PerlHandler Ocsinventory
    #Database name
    PerlSetVar DBNAME ocsweb
    #Database user
    PerlSetVar DBUSER ocs
    #Database password
    PerlSetVar DBPWD ocs
    #Listening server port
    PerlSetVar DBPORT 3306
    #Server hostname
    PerlSetVar DBHOST localhost
</Location>
```

Figure 3: Apache configuration sample file

Next, you have to create the directory where communication server will put his logs. Default is assumed to be “/var/log/ocsinventory-NG”. You also have to allow Apache web server to write in this directory. Usually, Apache web server runs under “apache” or “www-data” or “nobody” system account (you can see which account is used in your httpd.conf file). Here we assume “apache” account is used.

- ✓ mkdir /var/log/ocsinventory-NG
- ✓ chown -R apache:apache /var/log/ocsinventory-NG

If you put log directory in another place, you have to update the path in the file “Ocsinventory.pm”.

- ✓ vi Ocsinventory.pm
- ✓ Update line <use constant LOGPATH => “/var/log/ocsinventory-NG”;> to math your need.


Now, you can restart Apache web server for changes to take effect.

- ✓ /etc/rc.d/init.d/httpd restart

3.1.4 Configuring management server.


Open your favorite web browser and point it on URL [“http://administration_server/ocsreports”](http://administration_server/ocsreports) to connect the Administration server.

As database is not yet created, this will begin OCS Inventory setup process. Otherwise, you can rerun configuration process by browsing http://administration_server/ocsreports/install.php URL (this must be used when upgrading OCS Inventory administration server).

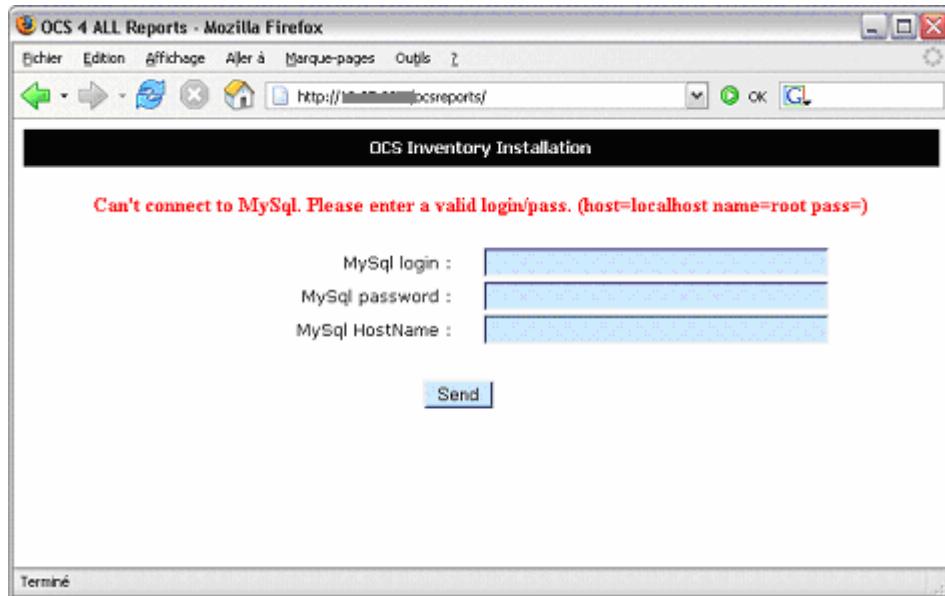


Fill in information to connect to MySQL database server with a user who has the ability to create database, indexes, etc (usually root):

- ✓ MySQL user name
- ✓ MySQL user password
- ✓ MySQL hostname

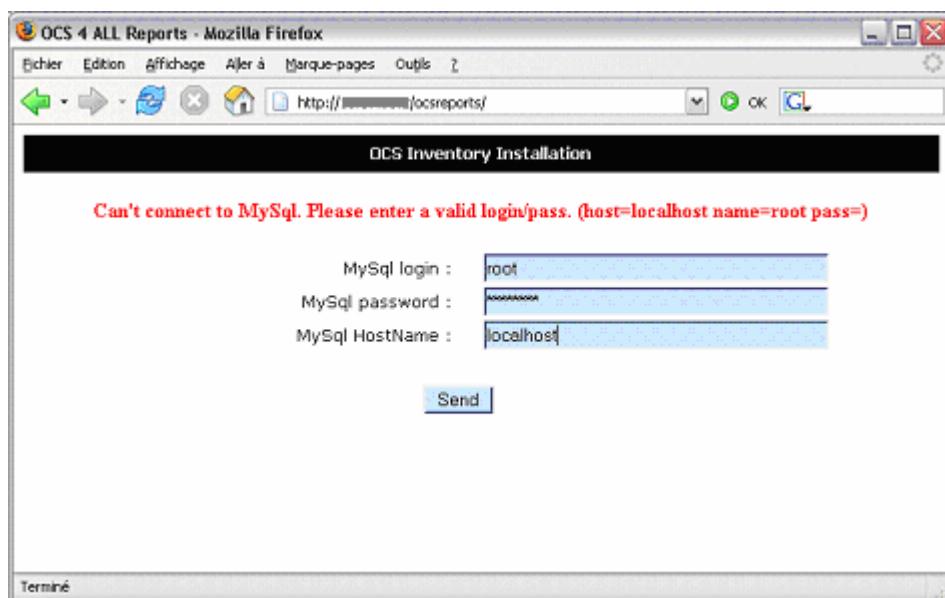


NB: Setup will create “ocsweb” database, and a MySQL user “ocs” with password “ocs”. It will also grant to user “ocs” privileges “Select | Insert | Update | Delete | Create | Drop | References | Index | Alter | Create temp | Lock” on database “ocsweb”. This user will be used by Administration server and Communication server to connect to the database. If you do not wish to use default MySQL user “ocs” with “ocs” password, you must update in the file “dbconfig.inc.php” PHP constants “COMPTE_BASE”, which is MySQL user login, and/or “PSWD_BASE”, which MySQL user password. Don’t forget to also update Communication server configuration, especially in apache configuration file.

Finally, you may fill in a text describing the TAG, a string displayed at first launch of the agent to ask user to enter the TAG Value. It's a generic data which allows you to sort the new computers (geographical site, first floor, john room....). If you don't want this functionality, just let it blank.

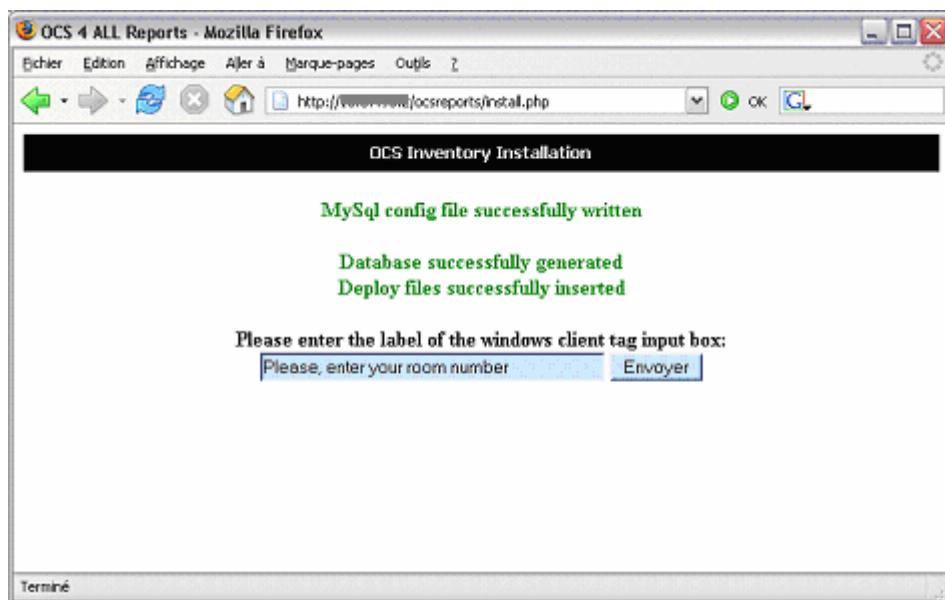

Configuration of Management server is now finished.

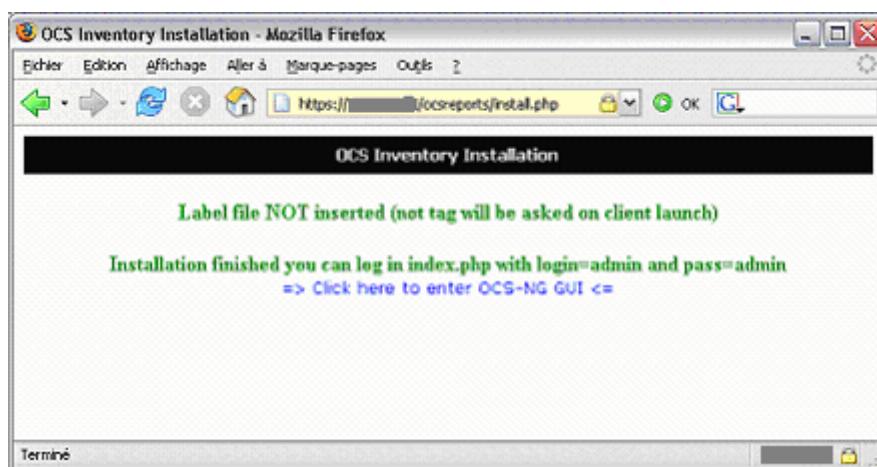

You can now make the directory “ocsreports” not writable for web user.

- ✓ chmod go-w /var/www/html/ocsreports

Just point your browser to the URL “http://administration_server/ocsreports” and login in with “admin” as login and “admin” as password.




3.1.5 Upgrading management server.

When new versions of web communication server or web administration server are released, you must upgrade your installation.


To upgrade web communication server, you must follow instructions as described in § 3.1.3 Installing Web communication server. You don't need to update Perl modules if not required in the release notes.

To upgrade web administration server, you must follow instructions as described in § 3.1.2 Installing Web administration server.

If you've upgraded web administration server, you must ensure that your database schema and default data are up to date. For this, just point your favorite web browser to URL “http://administration_server/ocsreports/install.php” to re-run configuration of management server as described in § 3.1.4 Configuring management server.

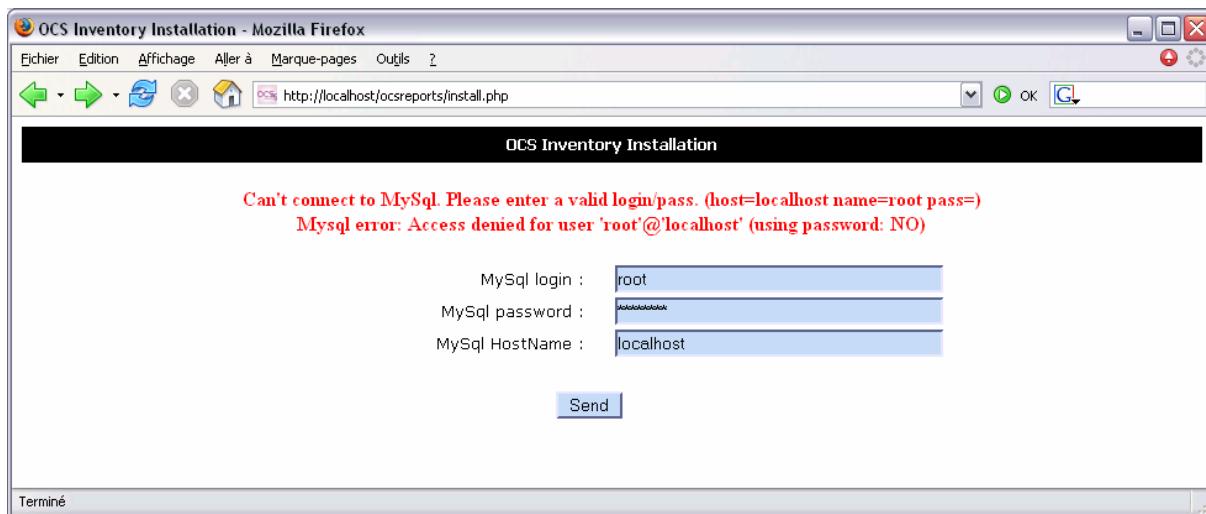

Fill in MySQL administrator name (usually root) and password, and MySQL database server address and click “Send” button.

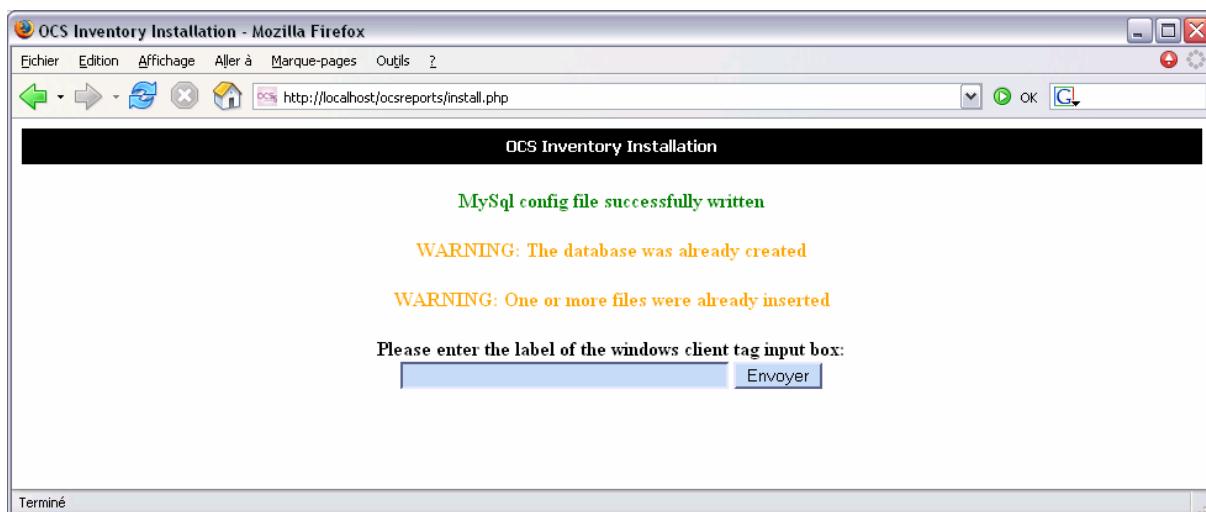

Finally, you may fill in a text describing the TAG if you wish to use it.

3.2 Under Windows Operating System.

We have chosen to package OCS inventory NG server for Windows as an integrated package containing all required components. As is, the 3 main components of Management server (database server, web communication server and web administration server) are installed on the same computer.

OCS Inventory NG server 1.0 RC1 for Windows is based on ApacheFriends XAMPP version 1.5.0 pl1 (<http://www.apachefriends.org/index-en.html>) which setup the following components on a single computer:


- ✓ Apache 2.0.55
- ✓ MySQL 5.0.15
- ✓ PHP 5.0.5 + PHP 4.4.1 pl1 + PEAR
- ✓ eAccelerator 0.9.4-dev
- ✓ PHP-Switch win32 1.0
- ✓ XAMPP Control Version 1.0 from www.nat32.com
- ✓ XAMPP Security 1.0
- ✓ SQLite 2.8.15
- ✓ OpenSSL 0.9.8a
- ✓ phpMyAdmin 2.6.4-pl3
- ✓ ADODB 4.65
- ✓ Mercury Mail Transport System for Win32 and NetWare Systems v4.01b
- ✓ FileZilla FTP Server 0.9.10a
- ✓ Webalizer 2.01-10
- ✓ Zend Optimizer 2.5.10a
- ✓ Perl 5.8.7
- ✓ **mod_perl 2.0.1**

NB: Even if all these components are installed, you will be able to choose the components you want to automatically start.


3.2.1 Installing management server.

You must have Administrator privileges to setup OCS Inventory NG server under Windows NT4, Windows 2000, Windows XP or Windows Server 2003.


Download “OCSNG_WINDOWS_SERVER_1.0-XX.zip” from OCS Inventory Web Site” (where XX is the last release version, for example 1.0-RC1), unpack it and launch “OcsSetup.exe.

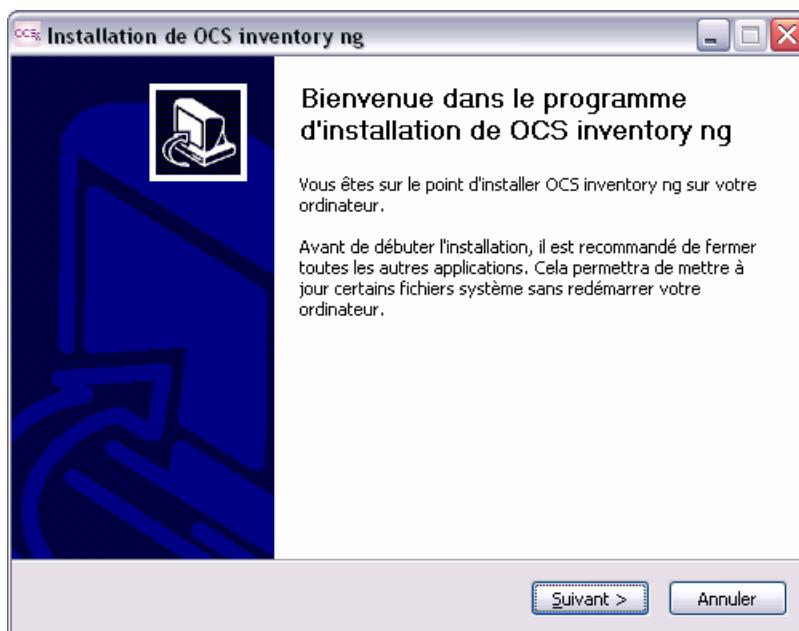


Click “Next” button and accept License agreement.

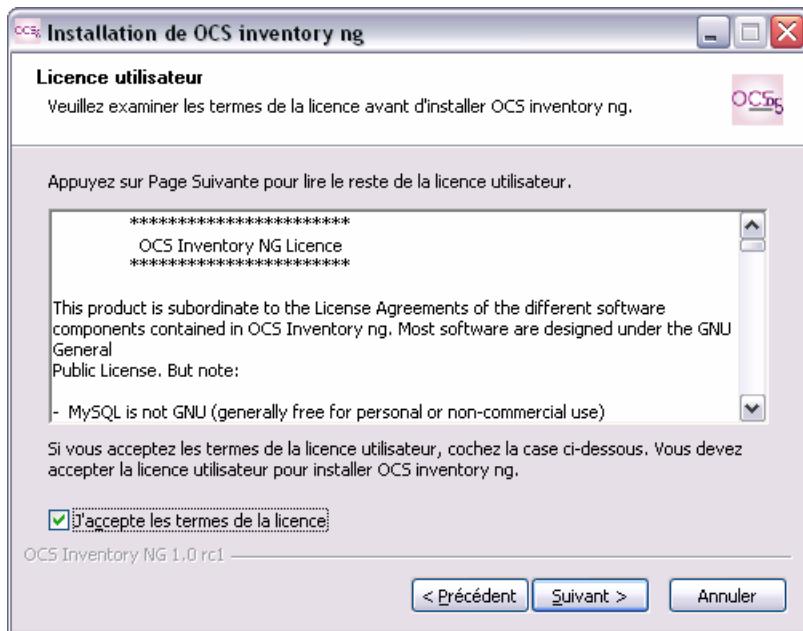

Choose installation directory, by default “C:\OCSInventoryNG”. You need 360 MB of free hard disk space.

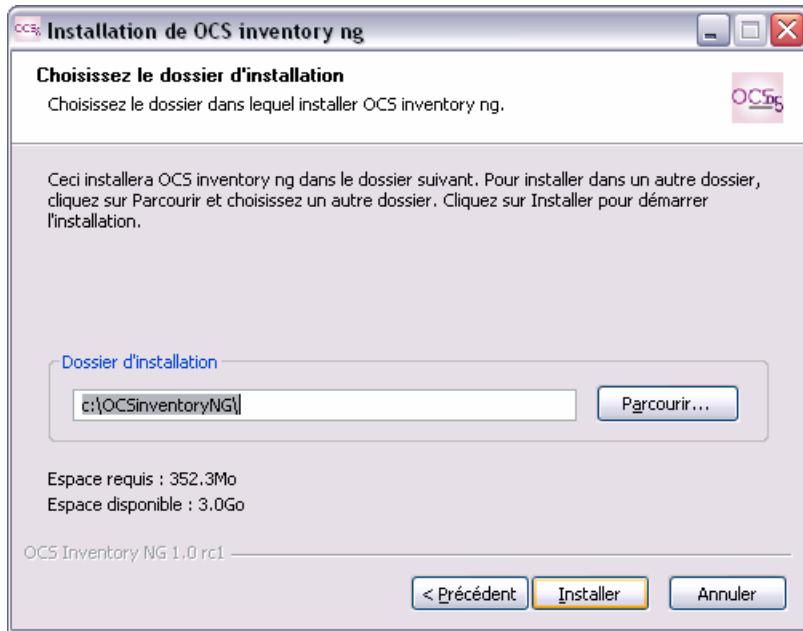

Next, all components are installed.

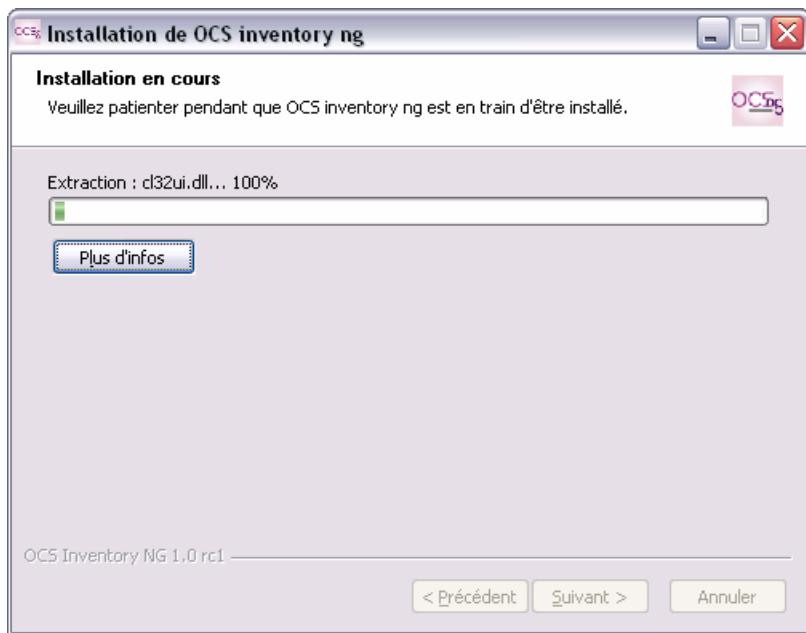

At the end of the process, a command prompt show you if everything is fine and ask you to press any key.

```
C:\WINDOWS\system32\cmd.exe
# ApacheFriends XAMPP setup win32 Version 1.4.1
#
# Copyright <c> 2002-2005 Apachefriends
#
# Authors: Kay Uogelgesang <kvo@apachefriends.org>
#          Carsten Wiedmann <webmaster@wiedmann-online.de>
#####
Configure for perl 5.8.7
Configure for server 1.5.0
Configure XAMPP with awk for 'Windows_NT'
Please wait ...
Enable AcceptEx Winsocks v2 support for NT systems DONE!


##### Have fun with ApacheFriends XAMPP! #####
Appuyez sur une touche pour continuer... -
```



Setup is now finished. You must start MySQL database server and Apache web server.




The XAMPP control panel is displayed to allow you to do this, **but don't use it because services are not started with good parameters, especially PERL support for Apache and MySQL old password support.**

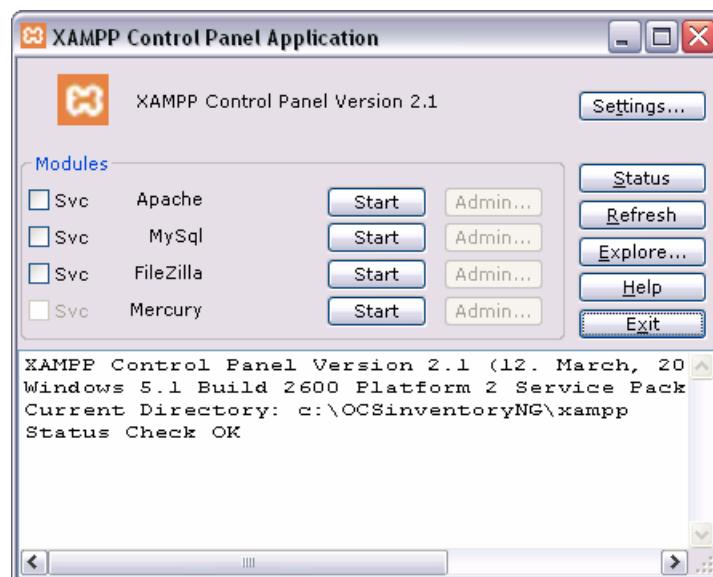

Close XAMPP control panel and open Windows Explorer.

Navigate to folder “C:\OCSInventoryNG\xampp\mysql” and run script “mysql_installservice.bat”.

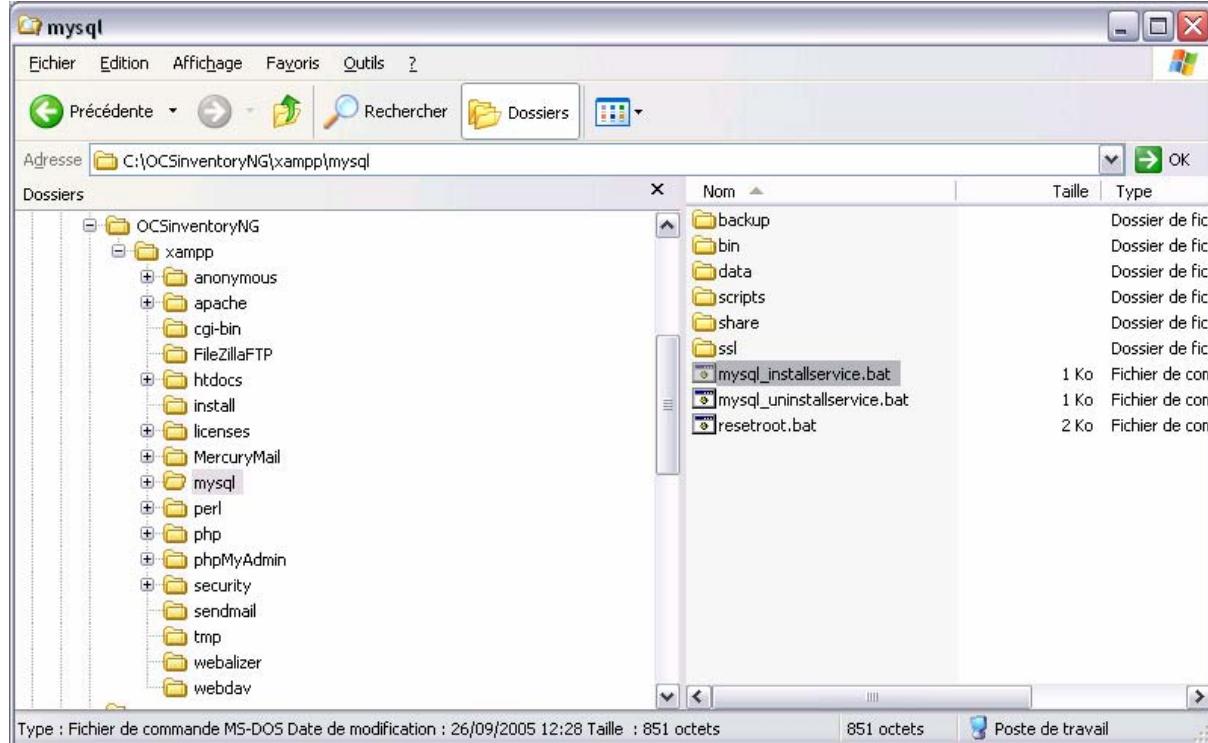


It will copy “my.ini” MySQL configuration file into Windows directory “C:\Windows” or “C:\WINNT”, install MySQL as a service and start it.


```
C:\WINDOWS\system32\cmd.exe
Installing MySQL as an Service
    1 fichier(s) copié(s).
Service successfully installed.
Try to start the MySQL deamon as service ...
Le service mysql démarre.
Le service mysql a démarré.

Appuyez sur une touche pour continuer... -
```


Navigate to folder “C:\OCSInventoryNG\xampp\apache1” and run script “apache_installservice.bat”.

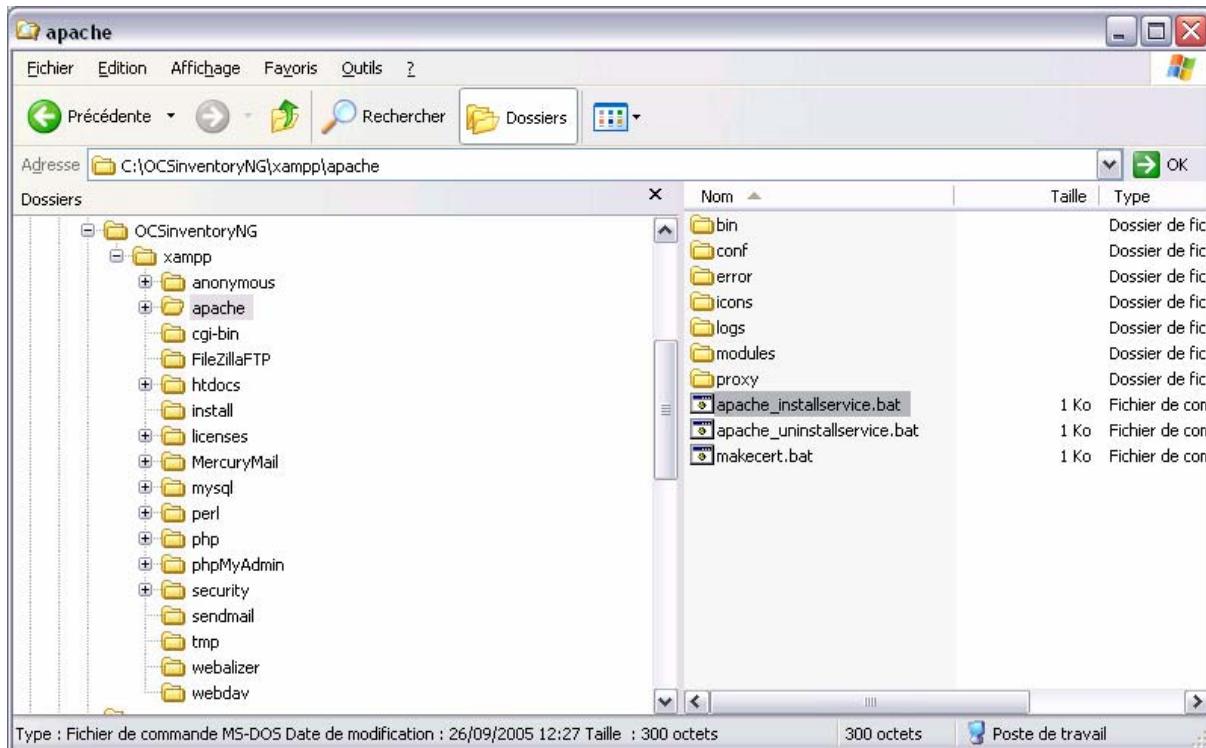

It will install Apache2 as a service and start it.

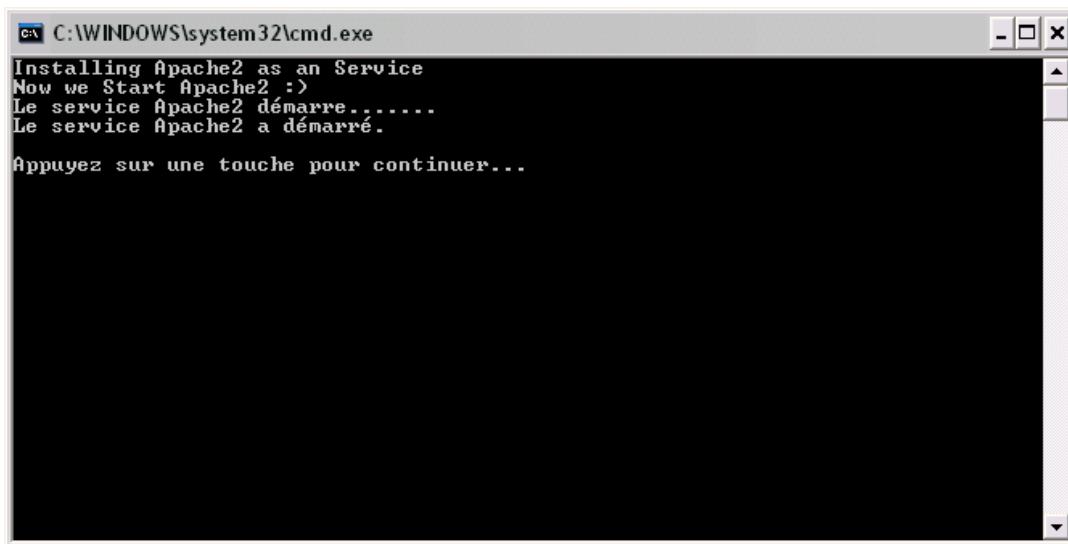

OCS Inventory NG setup for Windows has installed XAMPP components under “xampp” subfolder of selected installation directory. Apache web server document root directory is located in the “htdocs” sub directory of XAMPP. This is here that “ocsinventory-NG” communication server files and “ocsreports” administration server files are installed.

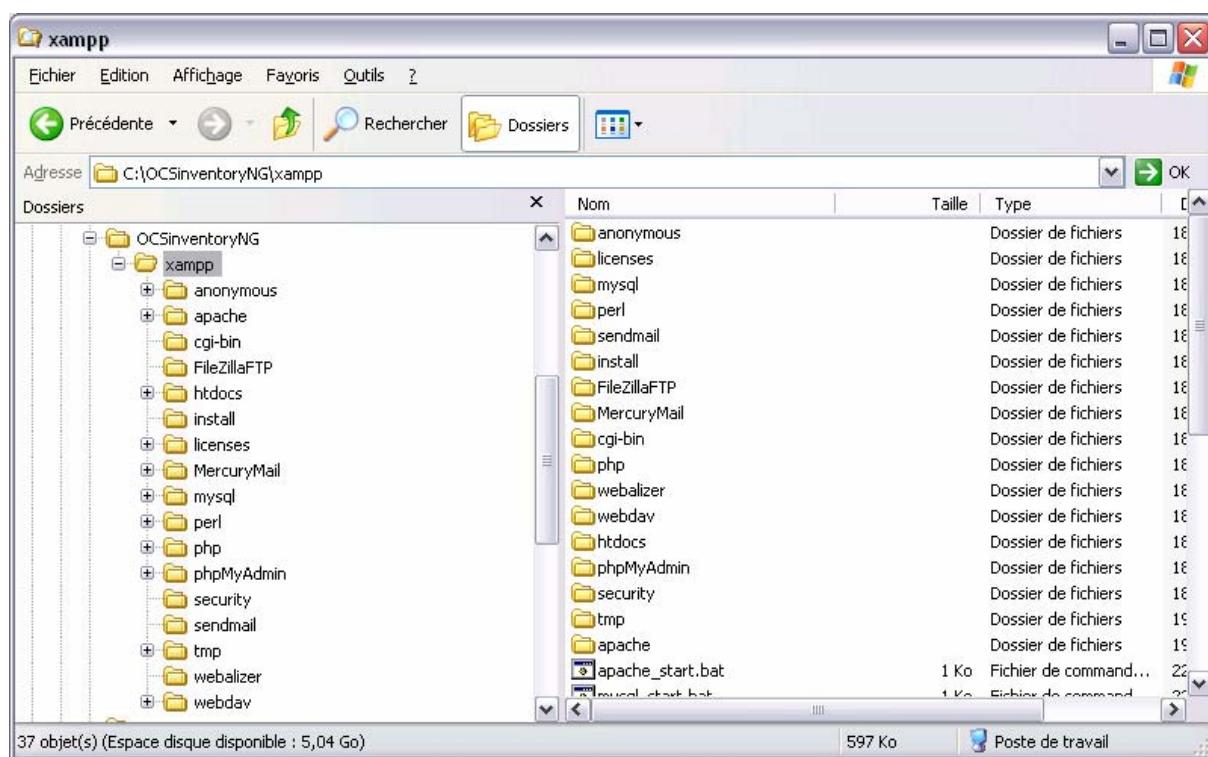


Apache logs (“access.log”, “error.log”, “phperror.log”) and communication server logs (“ocsinventory-NG.log”) are located in the sub-directory “Apache\Logs”.

3.2.2 Configuring management server.


Open your favorite web browser on the server and point it on URL [“http://localhost/ocsreports”](http://localhost/ocsreports) to connect the Administration server.

If you haven’t yet setup the security of XAMPP components, especially MySQL root password, the administration will automatically configure MySQL database and other options.

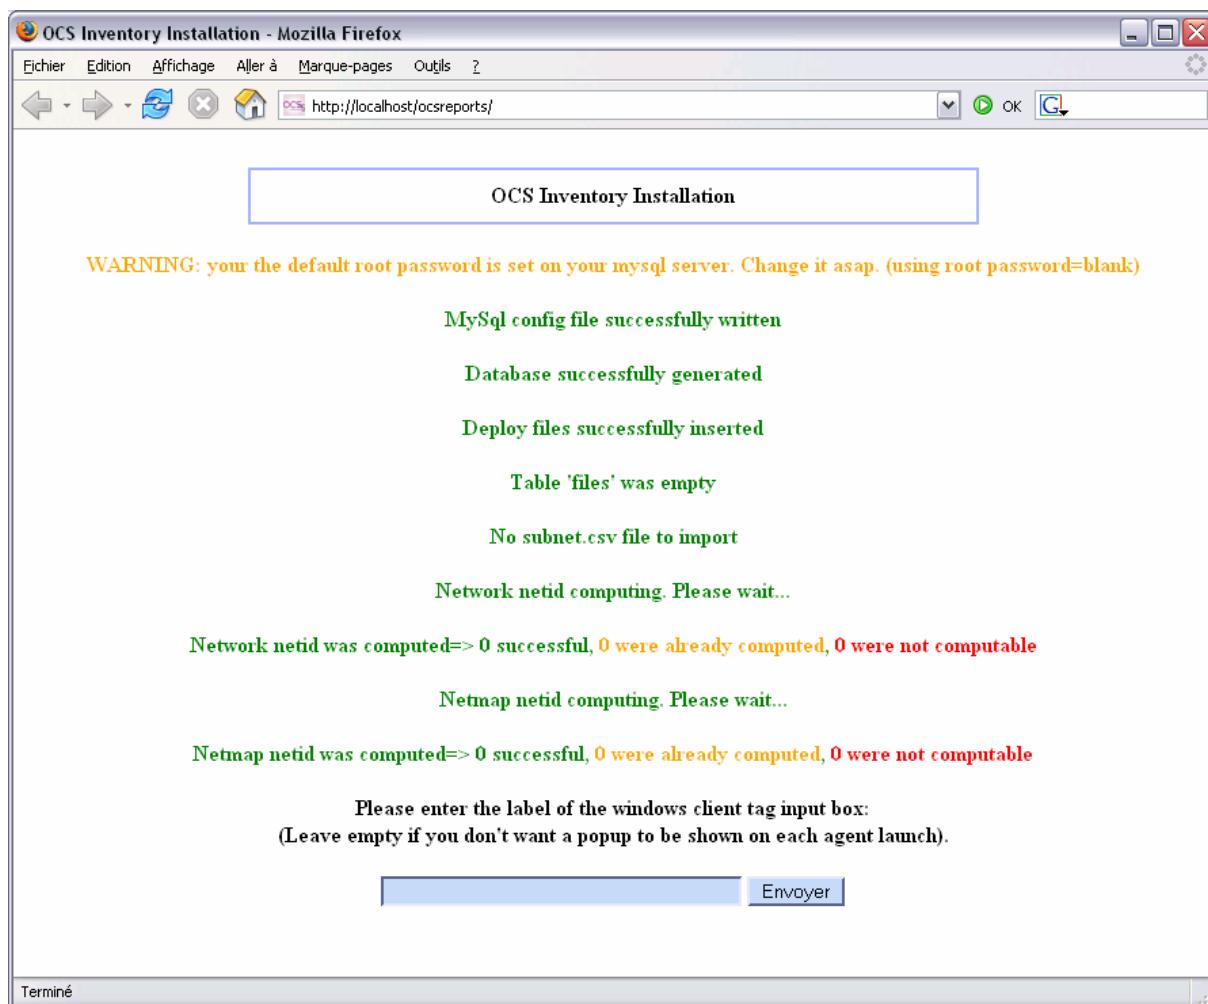

Otherwise, you will be prompted for information to connect to MySQL database server with a user who has the ability to create database, tables, indexes, etc:

- ✓ MySQL user name, “root” by default
- ✓ MySQL user password
- ✓ MySQL hostname, “localhost”

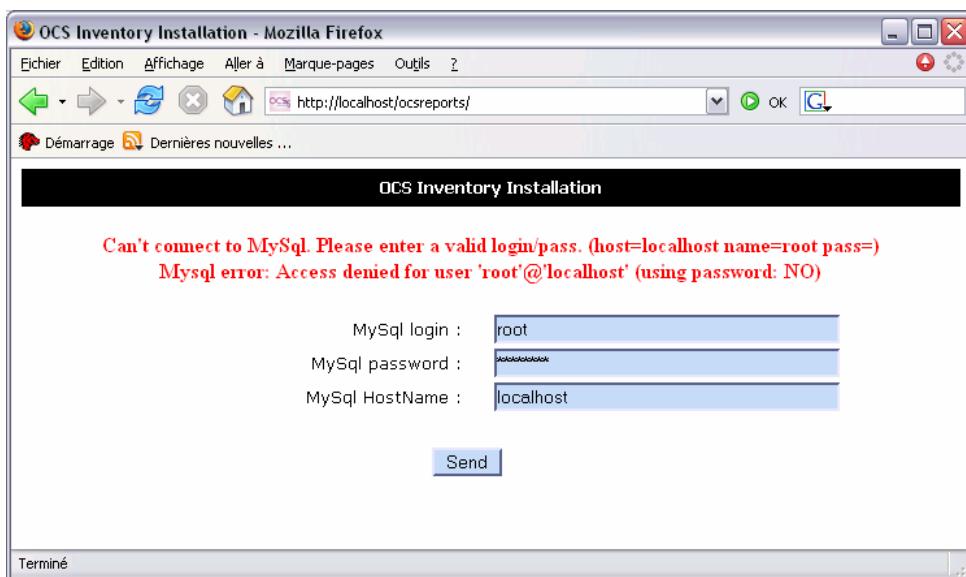


NB: Setup will create “ocsweb” database, and a MySQL user “ocs” with password “ocs”. It will also grant to user “ocs” privileges “Select | Insert | Update | Delete | Create | Drop | References | Index | Alter | Create temp | Lock” on database “ocsweb”. This user will be used by Administration server and Communication server to connect to the database. If you do not wish to use default MySQL user “ocs” with “ocs” password, you must update in the file “dbconfig.inc.php” PHP constants “COMPTE_BASE”, which is MySQL user login, and/or “PSWD_BASE”, which MySQL user password. Don’t forget to also update Communication server configuration, especially in apache configuration file.

Finally, you may fill in a text describing the TAG, a string displayed at first launch of the agent to ask user to enter the TAG Value. It's a generic data which allows you to sort the new computers (geographical site, first floor, john room....). If you don't want this functionality, just let it blank.



Configuration of Management server is now finished.

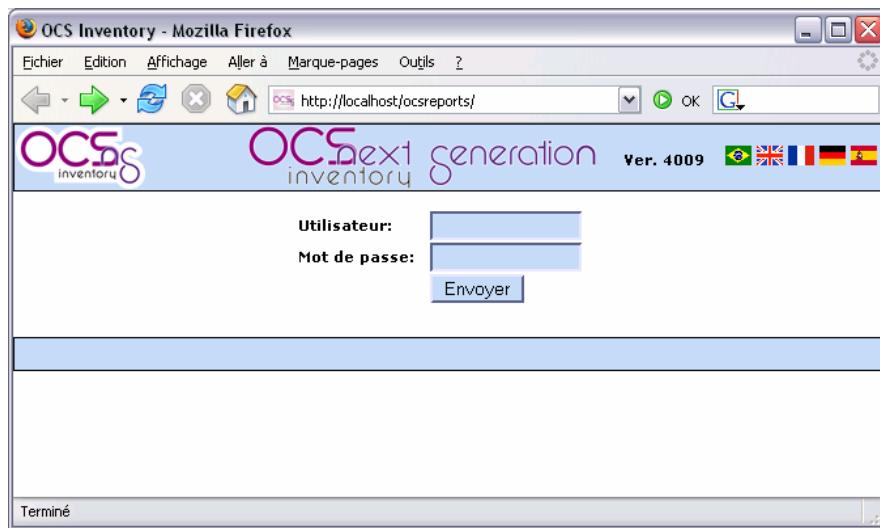


3.2.3 Updating security of XAMPP components.


By default, XAMPP is setup without security. MySQL root account do not have password, XAMPP web configuration interface is accessible by everybody without authentication...

You must update this.

Open your favorite web browser on the server and point it on URL "<http://localhost/xampp/splash.php>" to connect the XAMPP configuration GUI.

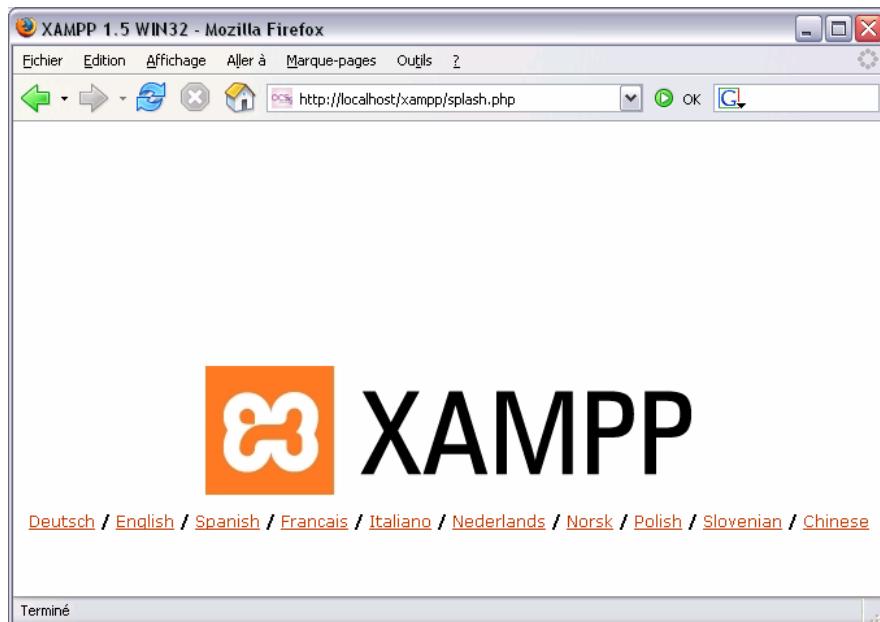

Click on the language you want to access the XAMPP main configuration menu.

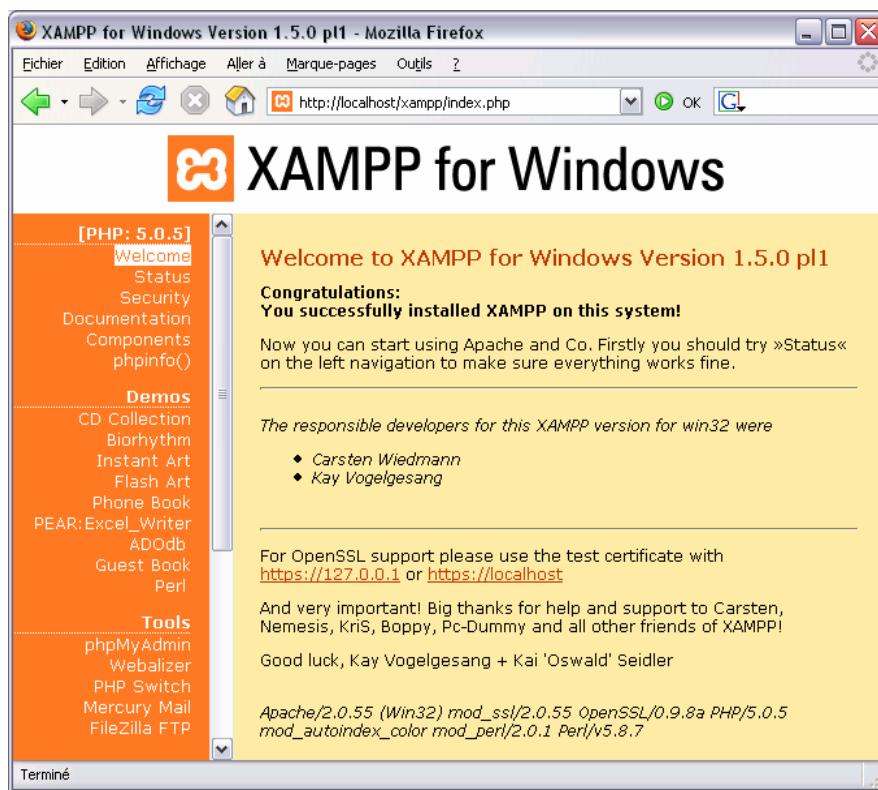


Then, click “Security” on the left menu. As you will see, all is marked as unsecure or unknown for non started components.

The screenshot shows a Mozilla Firefox browser window with the title "XAMPP for Windows | Security Section - Mozilla Firefox". The address bar displays "http://localhost/security/index.php". The main content area is titled "XAMPP SECURITY [Security Check 1.0]". A sidebar on the left lists "Languages" (Deutsch, English, Español, Français, Italiano, Nederlands, Norsk, Polski, Slovenian, ??) and a copyright notice for "APACHE FRIENDS". The main content table has columns "Subject" and "Status". The rows are:

Subject	Status
These XAMPP pages are accessible by network for everyone	UNSECURE
The MySQL admin user root has NO password	UNSECURE
PhpMyAdmin is free accessible by network	UNSECURE
A FTP server is not running or is blocked by a firewall!	UNKNOWN
PHP is NOT running in "safe mode"	UNSECURE

You can change this by clicking the link "<http://localhost/xampp/xamppsecurity.php>".

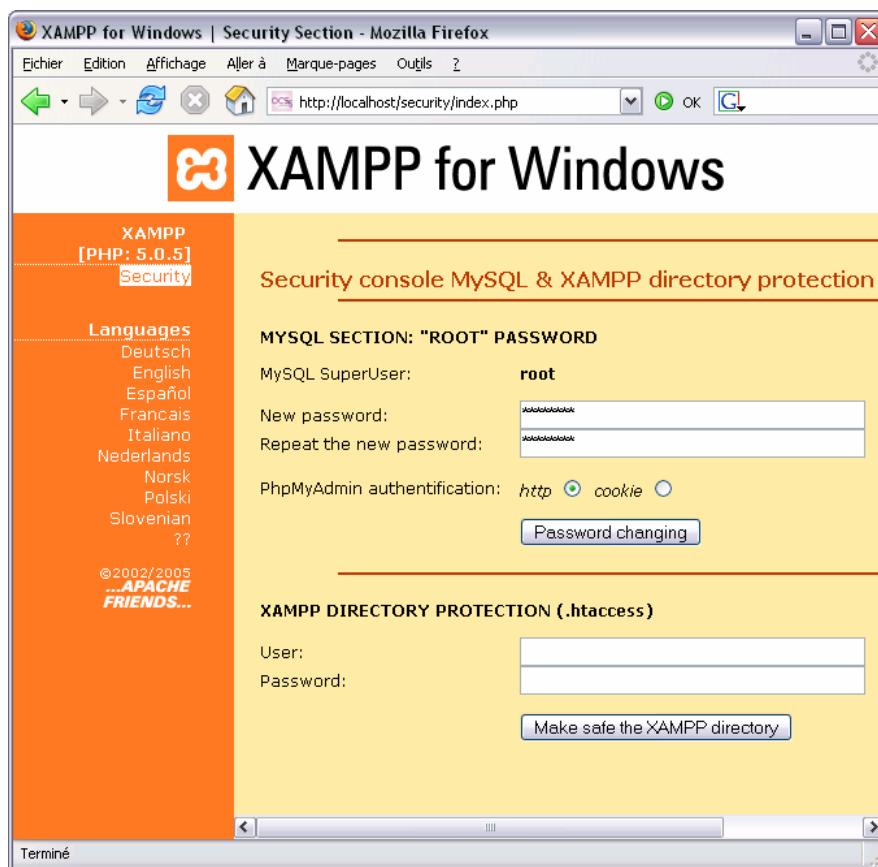


First of all, you must fill in MySQL root password and select phpMyAdmin authentication method.


We recommend using “cookie” authentication for phpMyAdmin, because we encounter many problems with HTTP authentication.

NB: You can change this at any time by visiting the security web page of XAMPP server.


Validate your changes by clicking “Password changing” button.

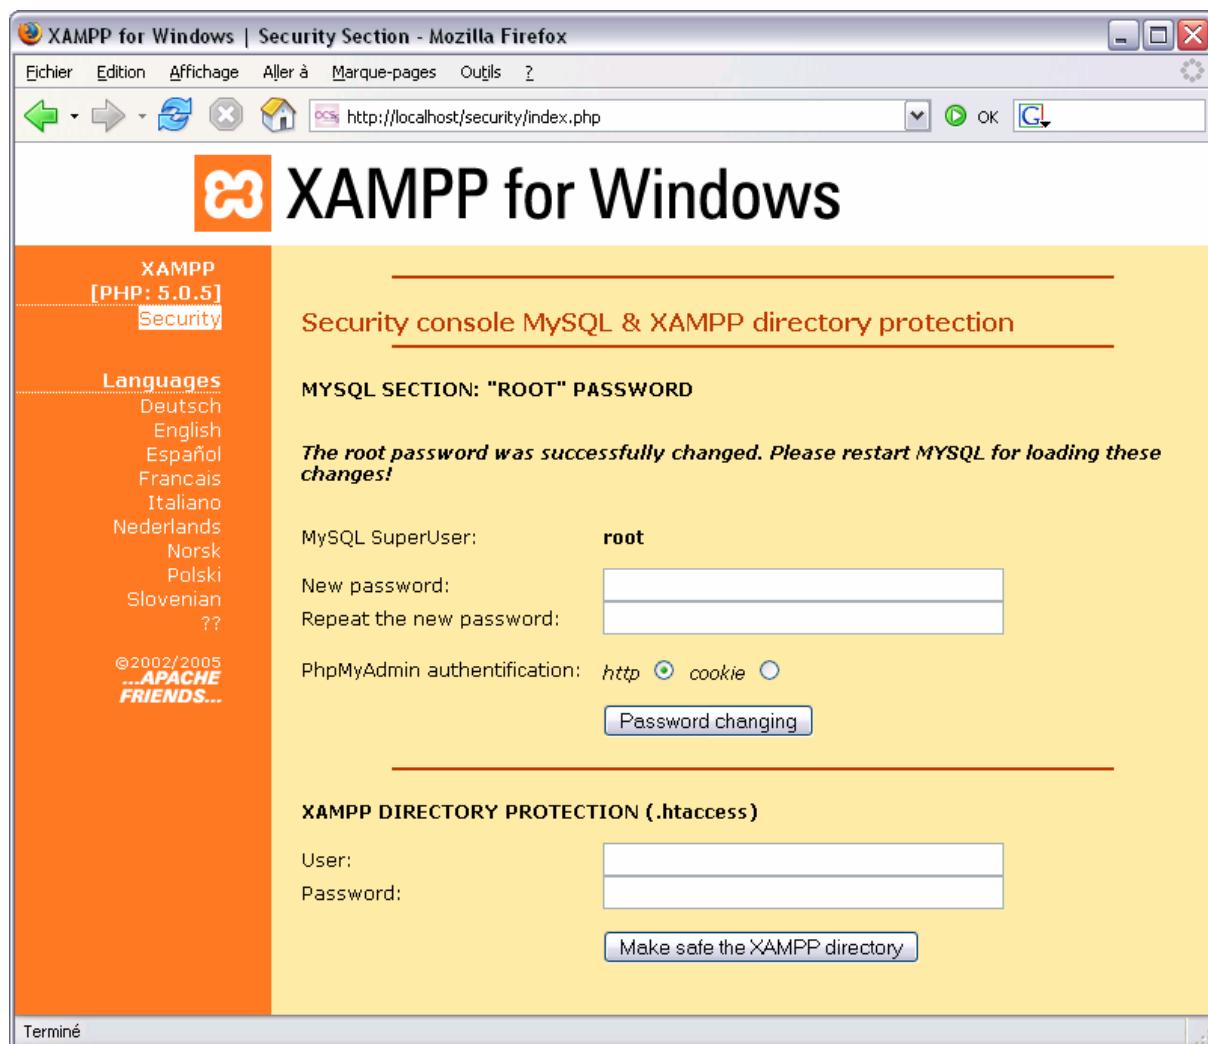

You can then protect the access to XAMPP configuration menu by filling in user and password for XAMPP DIRECTORY PROTECTION. As is, this user and password will be asked to connect to XAMPP configuration menu through a web browser.

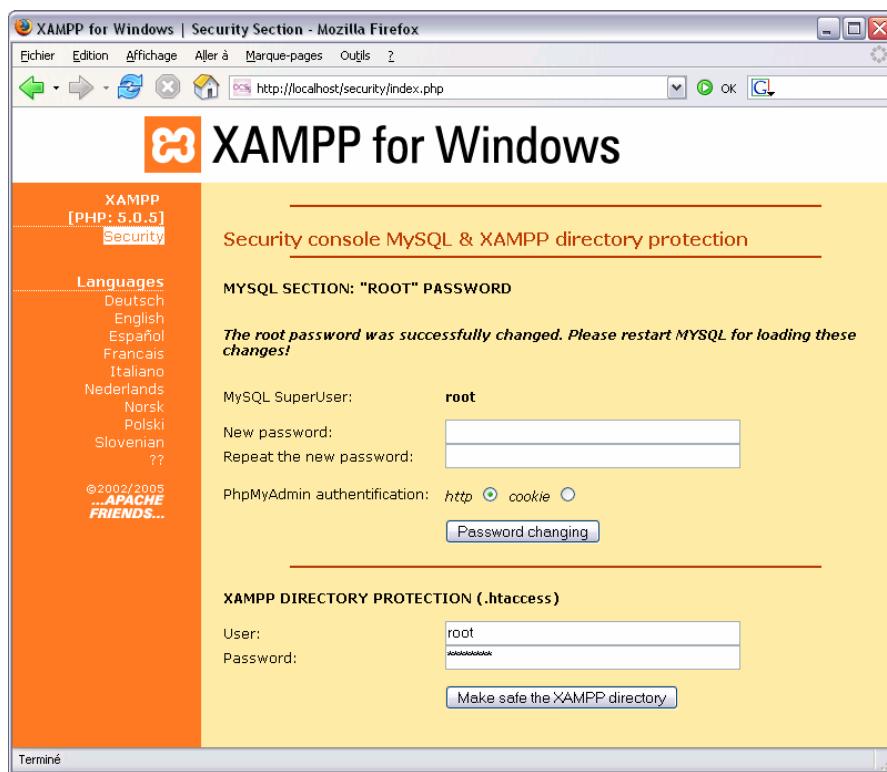

Validate your changes by clicking “Make safe the XAMPP directory” button.

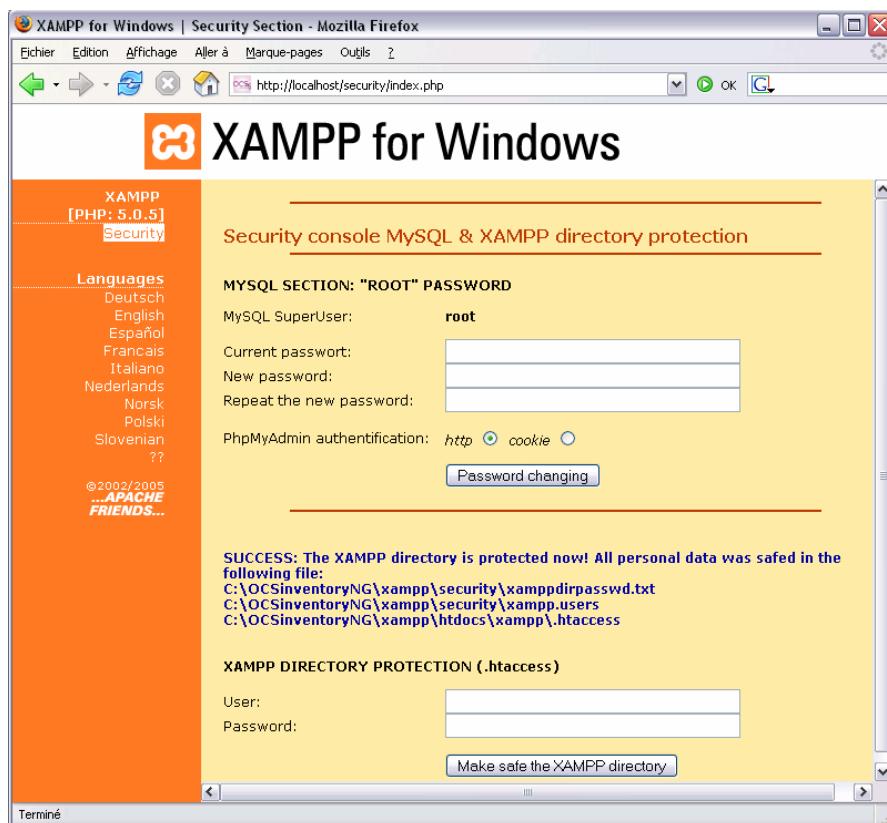


Now, you may enable PHP safe mode. Disabling safe mode is only recommended for development use.

Click on “phpinfo()” left side menu to display information about PHP installation.

The screenshot shows a Mozilla Firefox browser window displaying the XAMPP for Windows PHP info page. The URL in the address bar is <http://localhost/xampp/index.php>. The main content area shows the PHP Version 5.0.5 information. On the left, there is a sidebar with various links such as Welcome, Status, Security, Documentation, Components (with phpinfo() highlighted), Demos, CD Collection, Biorhythm, Instant Art, Flash Art, Phone Book, PEAR:Excel_Writer, ADOb, Guest Book, Perl, Tools (with phpMyAdmin, Webalizer, PHP Switch, Mercury Mail, FileZilla FTP), Languages (with Deutsch, English, Español), and Terminé. The right side of the page displays a table of PHP configuration details:

PHP Version 5.0.5	
System	Windows NT PT32507DL 5.1 build 2600
Build Date	Oct 25 2005 17:26:15
Configure Command	cscript /nologo configure.js --enable-snapshot-build
Server API	Apache 2.0 Handler
Virtual Directory Support	enabled
Configuration File (php.ini) Path	C:\OCSInventoryNG\xampp\apache\bin\php.ini
PHP API	20031224
PHP Extension	20041030
Zend Extension	220040412
Debug Build	no
Thread Safety	enabled
Zend Memory Manager	enabled
IPv6 Support	enabled
Registered PHP Streams	php, file, http, ftp, compress.zlib, https, ftps
Registered Stream Socket Transports	tcp, udp, ssl, sslv3, sslv2, tls


You will see where is located the file “php.ini”, which store configuration about PHP (by default, “C:\OCSInventoryNG\xampp\apache\bin\php.ini”). Open this file with your favorite text editor and update the line “safe_mode = Off” to “safe_mode = “On”.

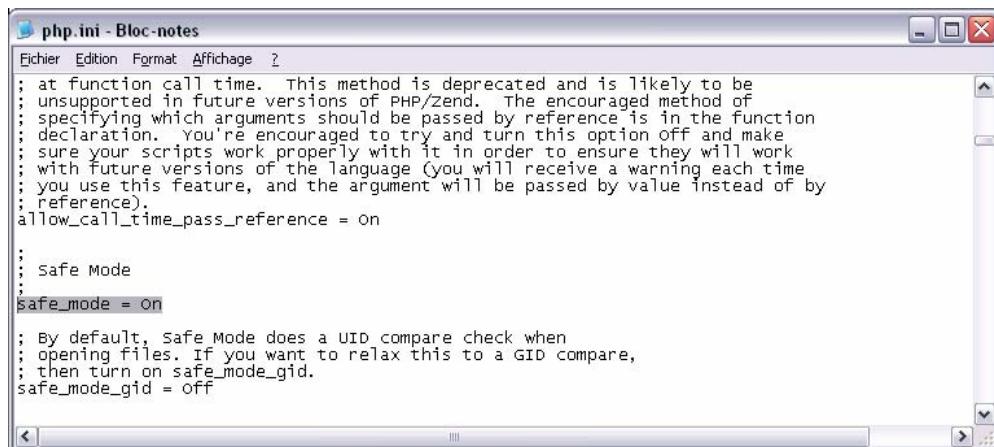

Finally, you must restart Apache and MySQL services for changes to take effect.

Open XAMPP Control Panel from system tray or from “OCS Inventory NG” start menu folder, click “Stop” button for Apache, then “Start” button and do the same for MySQL.

You can now reselect “Security” on left side menu to see that all started services are now secured.

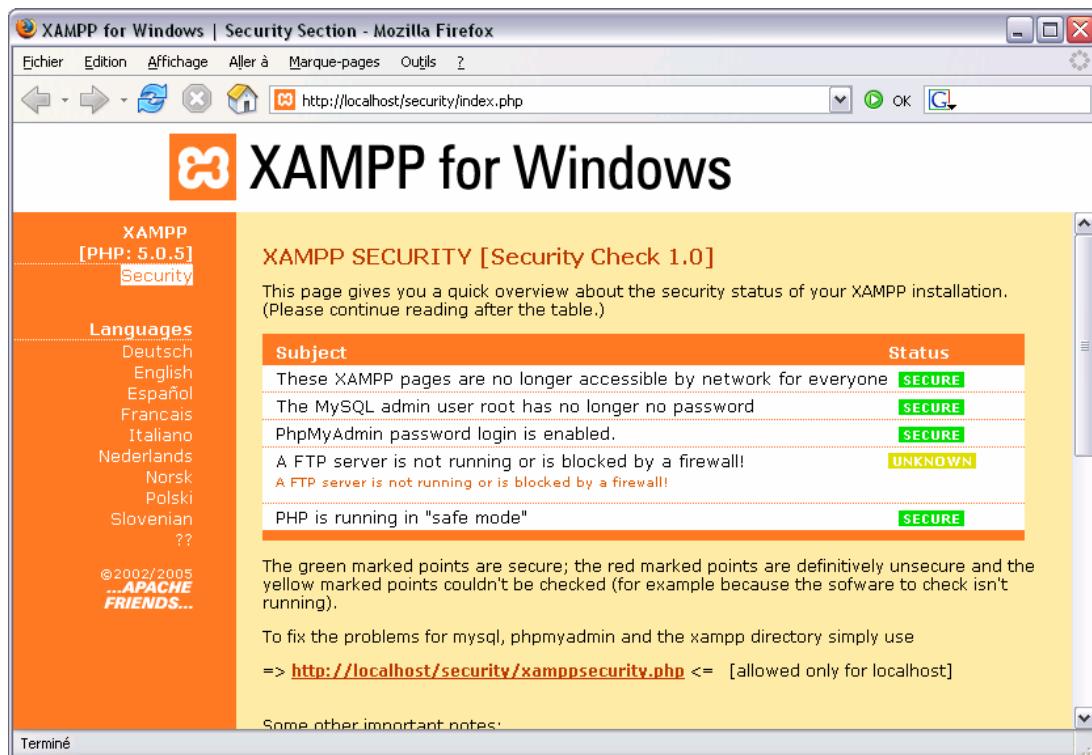


3.2.4 Upgrading management server.


Because of upgrade problems from XAMPP 1.4.14, you must uninstall previous installation of OCS Inventory NG Server for Windows.

But there is a way to not loose all data. Follow exactly instructions below.

- 1) First step, you must stop Apache and MySQL servers. If needed, use XAMPP Control Panel to unset XAMPP service automatic start (just uncheck XAMPP Service in “Settings” dialog box) and then restart computer.
- 2) Make a backup of all your MySQL database files by copying folder “C:\OCSInventoryNG\xampp\mysql\data” to another place. If your server only hosts OCS Inventory NG application, you just have to backup OCS Inventory NG database, available under folder “C:\OCSInventoryNG\xampp\mysql\data\ocsweb”.

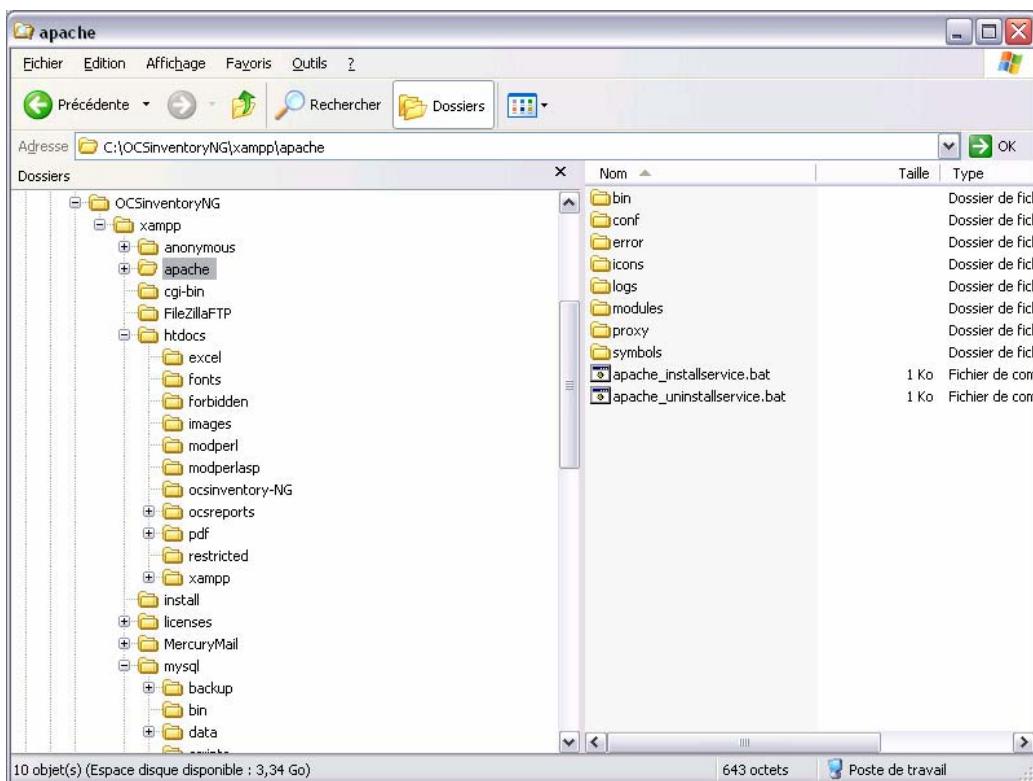

- 3) Make a backup of any configuration files or document files you've added/modified to standard installation, especially under Apache document root "htdocs".
- 4) Run OCS Inventory NG uninstall program from Control Panel applet "Add/remove programs".

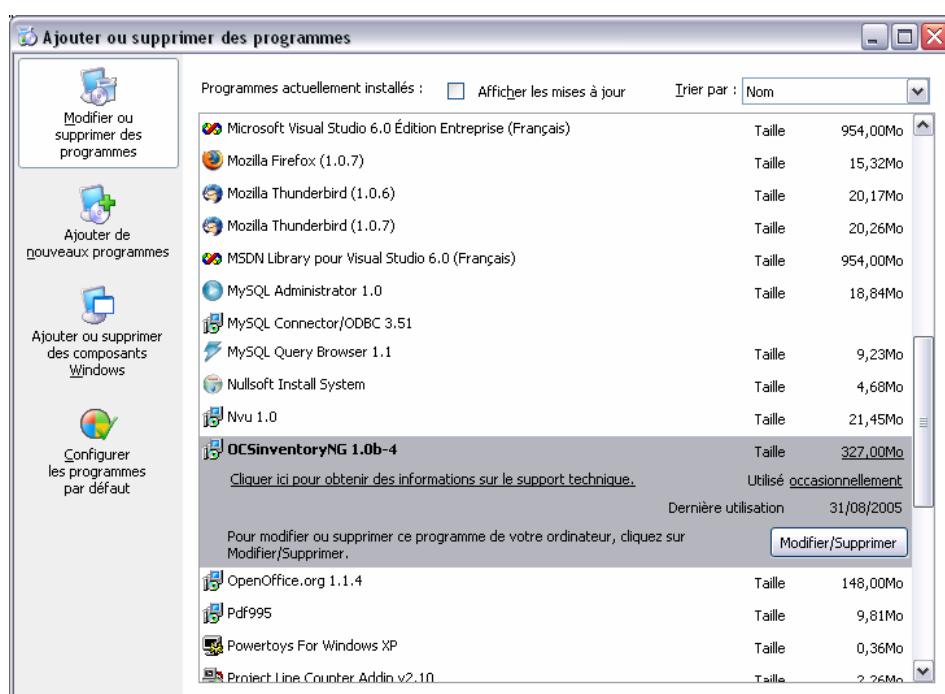




5) Remove directory “C:\OCSInventoryNG”.

6) Run new OCS inventory NG Server for Windows setup, as described in § 3.2.1 Installing management server., **but, before starting services and running “install.php” script, restore your database files and any files previously added.**


NB: If you've made updates to configuration files of XAMPP components (Apache, MySQL, etc...), you must paste them in the new configuration files.

7) Install Apache and MySQL services, update XAMPP security as described in § 3.2.1 Installing management server.

8) Point your favorite web browser to URL [“http://administration_server/ocsreports/install.php”](http://administration_server/ocsreports/install.php) to re-run configuration of management server as described in § 3.2.2 Configuring management server.

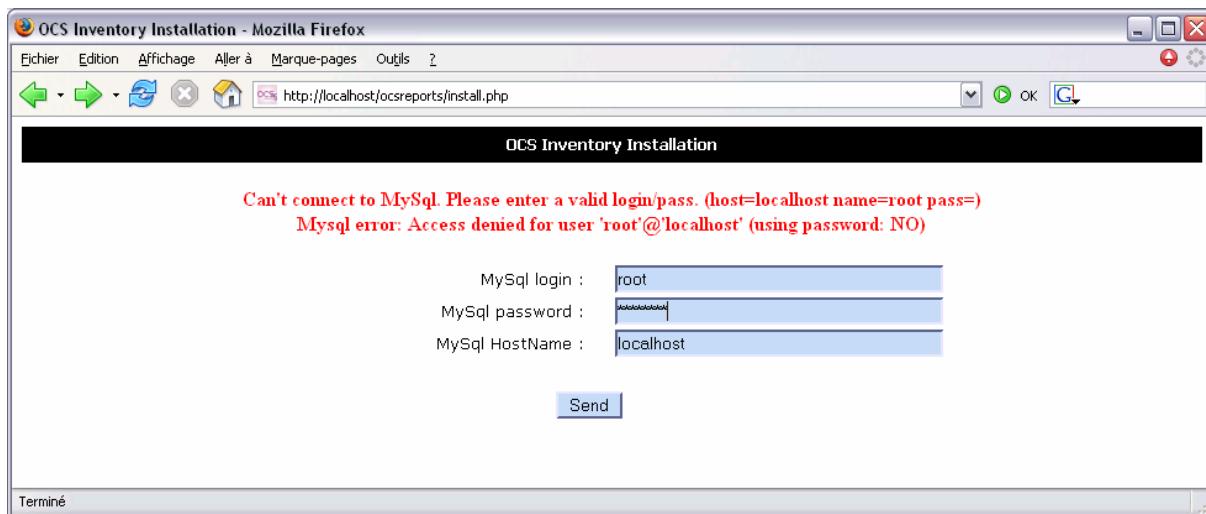

Fill in MySQL administrator name (usually root) and password, and MySQL database server address and click “Send” button.

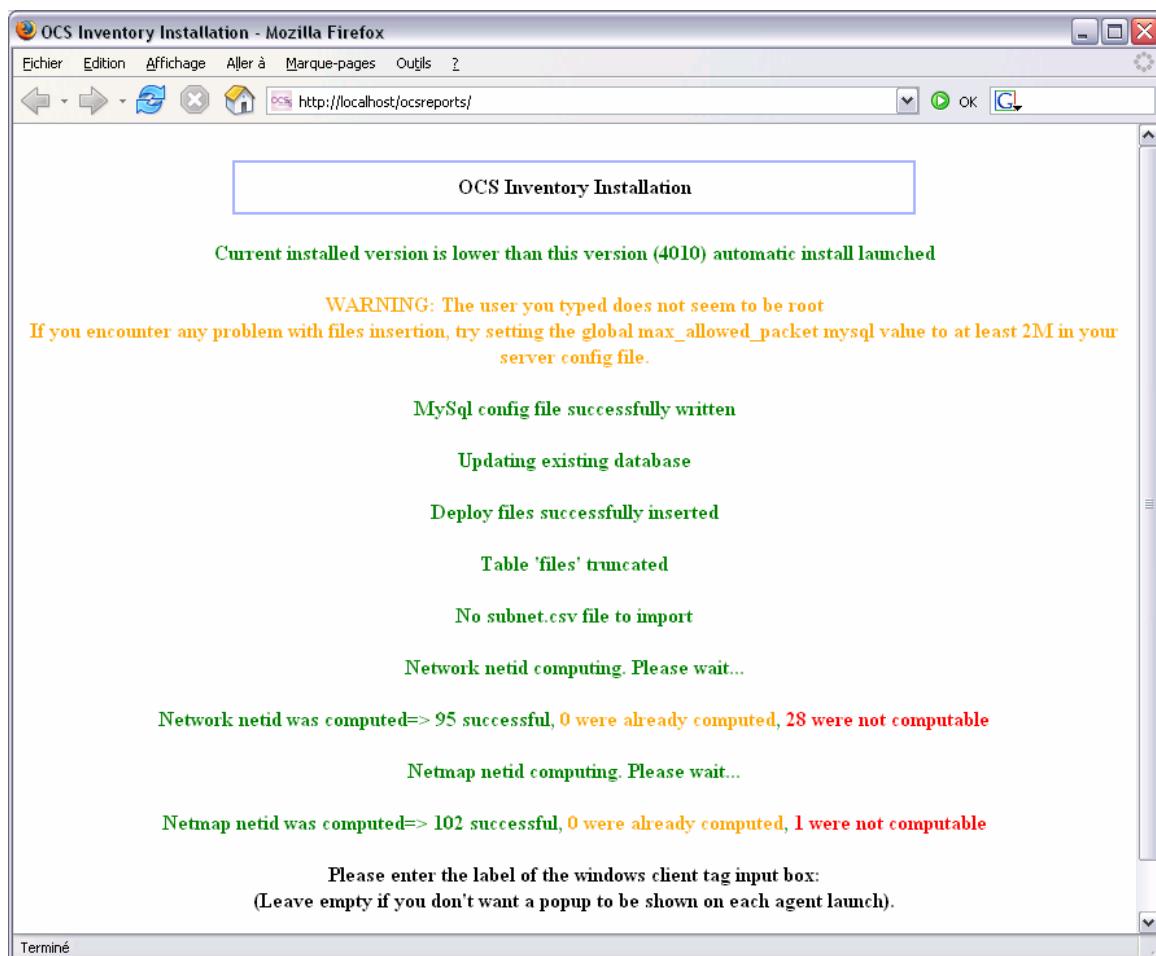

Finally, you may fill in a text describing the TAG if you wish to use it.

4 Setting up agent on client computers.

There are 2 methods to inventory a client computer using OCS Inventory NG agent:

- ✓ If the client computer cannot connect to the Communication server, inventory is done locally and is stored in a XML compressed file with “.ocs” extension. User can then send this file through email, USB disk or any other way to the administrator, which will import it in the database through the Administration server.
- ✓ If the client computer can reach using HTTP protocol the Communication server through the network, agent ask the Communication server for inventory parameters and send inventory results directly to the Communication server.

4.1 Under Windows Operating Systems.

There is 2 way to deploy OCS Inventory NG agent on Windows powered computers.

Download and unzip OCSNG_WINDOWS_AGENT_1.0-XX.zip (where XX is the last release version, like 1.0-RC1). This package contains 2 files:

- ✓ OcsLogon.exe, launcher of OCS Inventory NG agent to be used when deploying the agent through a login script or Active Directory GPO in the domain.
- ✓ OcsAgent.exe, setup for installing OCS Inventory NG agent locally or running a local inventory on non network connected computers.

NB: If you are upgrading from Windows agent version 4.0.0.1 or 4.0.0.2 to version 4.0.1.0 or newer, because of bug fixes in automatic update process in previous, you cannot use automatic deployment feature in administration server. You must use launcher “OcsLogon.exe” with command line switch “/DEPLOY:4010”.

4.1.1 Deploying the agent through login script.

Launcher “OcsLogon.exe” will try to connect by default to the Communication server using a DNS name “ocsinventory-ng”, like if you open your favorite web browser and enter the URL <http://ocsinventory-ng/ocsinventory>.

To use a different URL if you cannot add this DNS name, just rename “OcsLogon.exe” with the DNS name or IP address of the Communication server (for example “commincation-server.domain.tld.exe” or “ocsinventory.domain.tld.exe” or “10.37.98.2.exe”). Launcher then will try to connect to the DNS name or IP address you’ve named it (http://communication_server.domain.tld/ocsinventory or <http://10.37.98.2/ocsinventory>).

NB: Always use last version of OcsLogon.exe. You can get it from last package **OCS-NG_WINDOWS_AGENT_1.0-XX.zip**.

Copy files “OcsLogon.exe” (or the renamed one) to a shared folder somewhere in your network. This folder must readable by all your users. Then add a call to “OcsLogon.exe” (or to the renamed one) in the login script of your users.

```
@echo off  
echo Running system inventory, please wait...  
REM Call to OCS Inventory NG agent for deployment  
REM Using shared folder MY_SHARE on server MY_SERVER  
REM Connecting to Communication server 10.37.98.2  
“\\MY_SERVER\MY_SHARE\10.37.98.2.exe”  
echo Done. Thanks a lot.
```

Figure 4: Sample login script for Windows domain

NB: To be compliant with Windows 9X, you must enclose path to renamed launcher between quotes in the script, otherwise Windows 9X will not use long filename, but sort name like “103798~1.exe” and launcher will not be able to find correct IP address or DNS name.

Launcher will contact Administration server in HTTP to download latest agent binaries and setup locally the agent on the computer in the folder “C:\ocs-ng” or, if the locally connected user do not have permission to create folder in the root directory, in the folder “ocs-ng” in the user’s temporary directory. It will also write a configuration file “OCSInventory.dat” in the agent folder where it will put configuration options downloaded from the Communication server. Then, it will launch OCS Inventory NG agent.

NB: since version 4.0.1.0 of Windows agent, configuration file “OCSInventory.dat” is now encrypted and cannot be edited manually.

If agent is already installed, launcher will just run the agent.

If agent is not up to date, it will download and setup agent’s new release, then launch agent.

OCS Inventory NG agent begins by contacting Administration server in HTTP to query if inventory is needed and to download inventory parameters.

NB: Launcher OcsLogon.exe may encounter problems accessing the Communication Server if you have configured a proxy with authentication in Microsoft Internet Explorer settings. You can force Launcher to not use proxy with “/np” command line switch. You can also specify a different IP port to use for Communication server with “/pnum:XX” command line switch, where XX is the IP port number to use. See § 4.1.3 Agent’s command line switches.

When launched for the first time, OCS Inventory NG agent will prompt the user for the TAG value (if this feature is enabled). Help text displayed in the dialog-box is the one you've entered in § 3.1.4 Configuring management server. User may enter this value, or leave it blank (you will be able to update this value through the Administration server).



Then (or otherwise if TAG feature is not enabled), it will do the inventory and send in HTTP inventory results to Communication server.


4.1.2 Installing the agent manually on a non network connected computer.

Setup can be run by a normal user, or better by a system administrator.

You just have to run file “OcsAgent.exe /local” to launch OCS Inventory NG agent’s setup. Setup will try to install OCS Inventory NG agent’s files in the folder “C:\ocs-ng” or, if the locally connected user do not have permission to create folder in the root directory, in the folder “ocs-ng” in the user’s temporary directory. It will write a configuration file “OCSInventory.dat” in the agent folder where it will put default configuration options. Then, it will launch OCS Inventory NG agent.

NB: since version 4.0.1.0 of Windows agent, configuration file “OCSInventory.dat” is now encrypted and cannot be edited manually.

Agent will then prompt user for folder where to store inventory results.

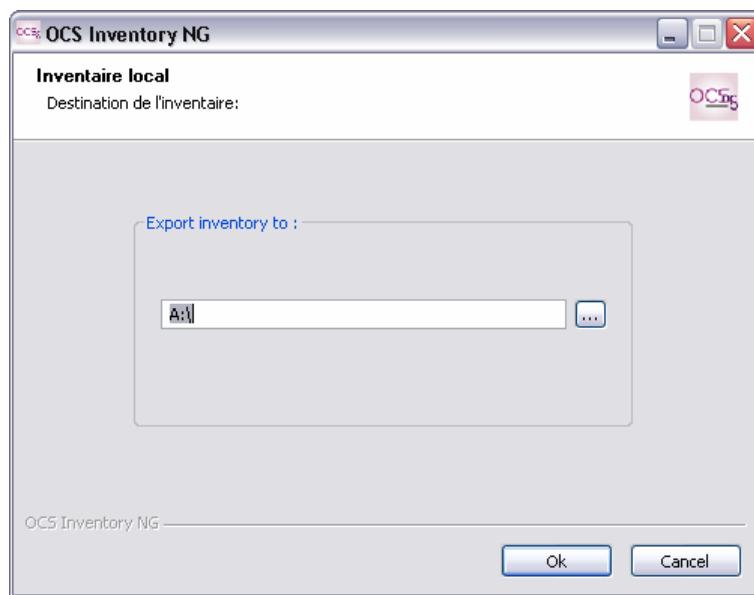

When launched for the first time, OCS Inventory NG agent will prompt the user for the TAG value User may enter this value, or leave it blank (you will be able to update this value through the Administration server).



When inventory is finished, agent will display to user a message showing where the file name inventory results have been stored.



User then just has to send this file to administrator. Administrator will be able to import inventory results into the database through the Administration server.

If you want to run another inventory, you just have to rerun “OcsLogon.exe /local” from OCS Inventory NG agent’s installation folder.

4.1.3 Agent's command line switches

OCS Inventory Agent version 4.0.1.0 includes some command line switches to allow detecting errors.

When using launcher “OcsLogon.exe” to deploy agent or run the agent, you can use the following command line switches.

- ✓ **/server:[server name]**: force agent to connect to server “[server name]”.
- ✓ **/np**: disable use of proxy defined in Internet Explorer settings.
- ✓ **/pnum:X**: specify an IP port X for web communication server. By default, HTTP port 80 is used. You can force use of port 8080 for example with the argument /pnum:8080.
- ✓ **/local**: run agent in local inventory mode. So agent does not try to connect to Communication server. A file “[hostname].ocs”, containing inventory results in compressed XML, will be created in agent’s directory.
- ✓ **/file**: Same as /local, but with interaction with Communication server.
- ✓ **/xml**: Agent will create a non compressed XML file “[hostname].xml”, containing inventory results, in his directory. If not used in conjunction with /LOCAL, agent tries to connect to Communication server.
- ✓ **/notag**: client does not ask user for TAG value.
- ✓ **/hkcu**: force agent to search for installed software also under HKEY_CURRENT_USER registry hive.
- ✓ **/deploy:XXXX**: force deployment of a specific agent version XXXX. Use “/DEPLOY:4009” to upgrade agent version 4.0.0.1 or 4.0.0.2.
- ✓ **/debug**: create a log file “[hostname].log” in agent’s directory.
- ✓ **/force**: force agent to always send inventory results, independently of the FREQUENCY parameter.
- ✓ **/uid**: force agent to generate a new deviceid.
- ✓ **/dmi**: If computer serial number cannot be retrieved with WMI, force agent to use DMI tables while running “BiosInfo.exe” tool. Otherwise agent tries first BIOS functions and then DMI tables.
- ✓ **/biosfunc**: If computer serial number cannot be retrieved with WMI, force agent to use BIOS functions while running “BiosInfo.exe” tool. Otherwise agent tries first BIOS functions and then DMI tables.
- ✓ **/conf:[filename]**: tells agent to use “[filename]” as configuration file. Otherwise it will use default “Ocsinventory.dat” file.
- ✓ **/test**: agent only tests HTTP connection to communication server and write a file “ok.ok” if all is good. May be only used with /DEBUG, /NP et /PNUM switches (disable all other switches).
- ✓ **/ipdisc:[network number]**: force agent to run IPDISCOVERY feature on network numbered “[network number]” if server ask an inventory. May be used in conjunction with /force to ensure it will run. Cannot be used with /local.
- ✓ **/fastip**: agent only scan 5 IPs if it is elected as IPDISCOVER host (only usable for debug or test, may not be used in production)

Once agent is installed, you can run it manually to diagnose problems. Use “C:\ocs-
ng\OCSInventory.exe [options]” command line where [options] may be in the following
command line switches.

- ✓ **/server:[server name]:** force agent to connect to server “[server name]”.
- ✓ **/np:** disable use of proxy defined in Internet Explorer settings.
- ✓ **/pnum:X:** specify an IP port X for web communication server. By default, HTTP port
80 is used. You can force use of port 8080 for example with the argument
/pnum:8080.
- ✓ **/local:** run agent in local inventory mode. So agent does not try to connect to
Communication server. A file “[hostname].ocs”, containing inventory results in
compressed XML, will be created in agent’s directory.
- ✓ **/file:** Same as /local, but with interaction with Communication server.
- ✓ **/xml:** Agent will create a non compressed XML file “[hostname].xml”, containing
inventory results, in his directory. If not used in conjunction with /LOCAL, agent tries
to connect to Communication server.
- ✓ **/notag:** client does not ask user for TAG value.
- ✓ **/hkcu:** force agent to search for installed software also under
HKEY_CURRENT_USER registry hive.
- ✓ **/debug:** create a log file “[hostname].log” in agent’s directory.
- ✓ **/force:** force agent to always send inventory results, independently of the
FREQUENCY parameter.
- ✓ **/uid:** force agent to generate a new deviceid.
- ✓ **/dmi:** If computer serial number cannot be retrieved with WMI, force agent to use
DMI tables while running “BiosInfo.exe” tool. Otherwise agent tries first BIOS
functions and then DMI tables.
- ✓ **/biosfunc:** If computer serial number cannot be retrieved with WMI, force agent to use
BIOS functions while running “BiosInfo.exe” tool. Otherwise agent tries first BIOS
functions and then DMI tables.
- ✓ **/conf:[filename]:** tells agent to use “[filename]” as configuration file. Otherwise it
will use default “Ocsinventory.dat” file.
- ✓ **/test:** agent only tests HTTP connection to communication server and write a file
“ok.ok” if all is good. May be only used with /DEBUG, /NP et /PNUM switches
(disable all other switches).
- ✓ **/ipdisc:[network number]:** force agent to run IPDISCOVERY feature on network
numbered “[network number]” if server ask an inventory. May be used in conjunction
with /force to ensure it will run. Cannot be used with /local.
- ✓ **/fastip:** agent only scan 5 IPs if it is elected as IPDISCOVER host (only usable for
debug or test, may not be used in production)

4.2 Under Linux Operating Systems.

OCS Inventory NG agent for Linux can only be setup locally. You cannot deploy the agent
through the network as it’s possible for Windows agent. However, you can choose during
setup to activate auto-update of the agent if you’ve chosen HTTP inventory method.

You must have root privileges to setup Administration server.

OCS Inventory NG Agent for Linux requires PERL 5.6 or higher, and the 2 following modules:

- ✓ Perl module XML::Simple version 2.13-1 or higher
- ✓ Perl module Compress::Zlib version 1.34-1 or higher
- ✓ **Perl module Net::IP version 1.24 or higher**

NB: Linux agent version 8 or higher now requires PERL module Net::IP version 1.24 or higher. It also includes a new version 2 of binary ipdiscover.

Download them from <http://search.cpan.org>:

Install XML::Simple module.

- ✓ tar –xvzf XML-Simple-2.14.tar.gz
- ✓ cd XML-Simple-2.14
- ✓ perl Makefile.PL
- ✓ make
- ✓ make test
- ✓ make install

Install Compress::Zlib module.

- ✓ tar –xvzf Compress-Zlib-1.34.tar.gz
- ✓ cd Compress-Zlib-1.34
- ✓ perl Makefile.PL
- ✓ make
- ✓ make test
- ✓ make install

Install Net::IP module.

- ✓ tar –xvzf Net-IP-1.24.tar.gz
- ✓ cd Net-IP-1.24
- ✓ perl Makefile.PL
- ✓ make
- ✓ make test
- ✓ make install

Download “OCSNG_LINUX_AGENT_1.0-XX.tar.gz” from OCS Inventory Web Site (where XX is last release version, like 1.0-RC1).

Unpack it.

- ✓ tar –xvzf OCSNG_LINUX_AGENT_1.0-XX.tar.gz

Run OCS Inventory NG agent installer to setup agent in “/etc/ocsinventory-client” directory.

- ✓ cd OCSNG_LINUX_AGENT_1.0-XX
- ✓ perl ocsinventory-installer.pl

You will then have to choose between 2 methods for generating inventory:

1. http: computer is connected to the network and is able to reach the Communication server with HTTP protocol.
2. local: computer is not connected to the network and inventory will be generated in a file to send to administrator.

4.2.1 Installing the agent on a network connected computer.

To the question “Which method will you use to generate the inventory (http/local):”, answer “http” and then, specify IP address or DNS name of the Communication server.

```
#####
#INSTALLATION SCRIPT FOR OCSINVENTORY LINUX AGENT#
#####
```

Wich method will you use to generate the inventory (http/Local): http

Server name : 10.37.98.2

Then, indicate if you wish to use auto update of the agent feature. Answer “y” to activate auto update, “n” if you do not wish. You will also be able to enable/disable this feature trough the Administration server for all computers.

```
#####
#INSTALLATION SCRIPT FOR OCSINVENTORY LINUX AGENT#
#####
```

Will you activate the auto-update ? (y/n) : y

Setup will then prompt you for the TAG value. Type in the requested value, or leave field blank if you do not wish to use TAG value and press Enter.

```
#####
#INSTALLATION SCRIPT FOR OCSINVENTORY LINUX AGENT#
#####
```

Type the tag or return : 210

Finally, setup will show you all your inputs and will ask you to validate them. Answer “y” to validate and launch inventory, “n” to restart setup process from the beginning.

```
#####
#INSTALLATION SCRIPT FOR OCSINVENTORY LINUX AGENT#
#####
```

Your inputs :

```
Generating method = http
Server name      = 10.37.98.2
Auto-update       = on

tag = 210
```

Do you confirm ? (y/[n]) : y

Terminated :-)

```
Wed Jun 22 17:25:07 2005 => Transmission...done.
Wed Jun 22 17:25:07 2005 => Account infos up to date
Wed Jun 22 17:25:07 2005 => No update
Wed Jun 22 17:25:07 2005 => Terminated... :-)
Wed Jun 22 17:25:07 2005 => Execution time : 15 secs
```

Setup is now finished and inventory has been run for the first time, results sent to the Communication server.

Setup has done the following tasks:

- ✓ install OCS Inventory NG agent in directory “/etc/ocsinventory-client”,
- ✓ added a cron daily task “ocsinventory-client” in directory “/etc/cron.daily”,
- ✓ created a log directory “/var/log/ocsinventory-client” where OCS inventory NG will put his logs,
- ✓ added a logrotate task “ocsinventory-client” in directory “/etc/logrotate.d”,
- ✓ added a symbolic link “ocsinv” in directory “/bin” to allow you running the agent manually.

A configuration file “ocsinv.conf” has also been created in the directory “/etc/ocsinventory-client”, which contains all parameters for the agent.

```
<CONF>
<DEVICEID>linux.domain.tld-2005-06-22-18-25-36</DEVICEID>
<DMIVERSION>1</DMIVERSION>
<OCSFSERVER>10.37.98.2</OCSFSERVER>
<UPDATE>1</UPDATE>
</CONF>
```

Figure 5 : Sample agent's configuration file ocsinv.conf for a network connected computer.

4.2.2 Installing the agent on a non network connected computer.

To the question “Which method will you use to generate the inventory (http/local):”, answer “local”.

```
#####
#INSTALLATION SCRIPT FOR OCSINVENTORY LINUX AGENT#
#####
```

Wich method will you use to generate the inventory (http/Local): local

Then, indicate if you wish to use auto update of the agent feature. Answer “n” because agent is not able to download new release from the Communication server.

```
#####
#INSTALLATION SCRIPT FOR OCSINVENTORY LINUX AGENT#
#####
```

Will you activate the auto-update ? (y/n) : n

Setup will then prompt you for the TAG value. Type in the requested value, or leave field blank if you do not wish to use TAG value and press Enter.

```
#####
#INSTALLATION SCRIPT FOR OCSINVENTORY LINUX AGENT#
#####
```

Type the tag or return :

Finally, setup will show you all your inputs and will ask you to validate them. Answer “y” to validate and launch inventory, “n” to restart setup process from the beginning.

```
#####
#INSTALLATION SCRIPT FOR OCSINVENTORY LINUX AGENT#
#####
```

Your inputs :

*Generating method = local
Auto-update = off*

tag =

Do you confirm ? (y/[n]) : y

Terminated :-)

Choose your target directory ? : /root

Wed Jun 22 17:59:16 2005 => Inventory generated...

Wed Jun 22 17:59:16 2005 => Terminated... :-)

Wed Jun 22 17:59:16 2005 => Execution time : 17 secs

Setup is now finished and inventory has been run for the first time. Because you're in "local" mode, agent prompts you for entering the directory where to store inventory result file (file named with name of computer, date of inventory and ".ocs" extension). Enter the directory and then go into to send the file to OCS Inventory administrator.

Setup has done the following tasks:

- ✓ install OCS Inventory NG agent in directory "/etc/ocsinventory-client",
- ✓ created a log directory "/var/log/ocsinventory-client" where OCS inventory NG will put his logs,
- ✓ added a logrotate task "ocsinventory-client" in directory "/etc/logrotate.d",
- ✓ added a symbolic link "ocsinv" in directory "/bin" to allow you running the agent manually.

A configuration file "ocsinv.conf" has been created in the directory "/etc/ocsinventory-client", which contains all parameters for the agent.

```
<CONF>
<DEVICEID>linux.domain.tld-2005-06-22-18-40-54</DEVICEID>
<DMIVERSION>1</DMIVERSION>
<OCSFSERVER>local</OCSFSERVER>
</CONF>
```

Figure 6 : Sample agent's configuration file ocsinv.conf for a non connected computer.

4.2.3 Agent's command line switches

If you encounter error, agent's produce a log file in directory “/var/log/ocsinventory-client”.

However, agent's also support some command line switches. You can use them while launching the agent manually “/etc/ocsinventory-client/ocsinventory-client-1.0b.pl”

- ✓ **-local:** runs the agent in local mode, without any connection to communication server. You will be prompted for a target directory where agent will put inventory results in XML compressed file with “.ocs” extension.
- ✓ **-xml:** Agent will create a non compressed XML file with “.ocs” extension, containing inventory results. You will be prompted for a target directory where agent will put the file. If not used in conjunction with -local, agent tries to connect to communication server.

5 Administration of OCS Inventory NG.


Point your browser to the URL “http://administration_server/ocsreports” and login in with “admin” as login and “admin” as password.

You may at least change the password of the default administrator, or better, add a new one and remove the default one.

NB: All these features are only available to OCS Inventory NG administrators.

5.1 Managing OCS Inventory NG Administration server users.

Click on the toolbar “Users” menu to display all configured OCS Inventory NG Administration server users.

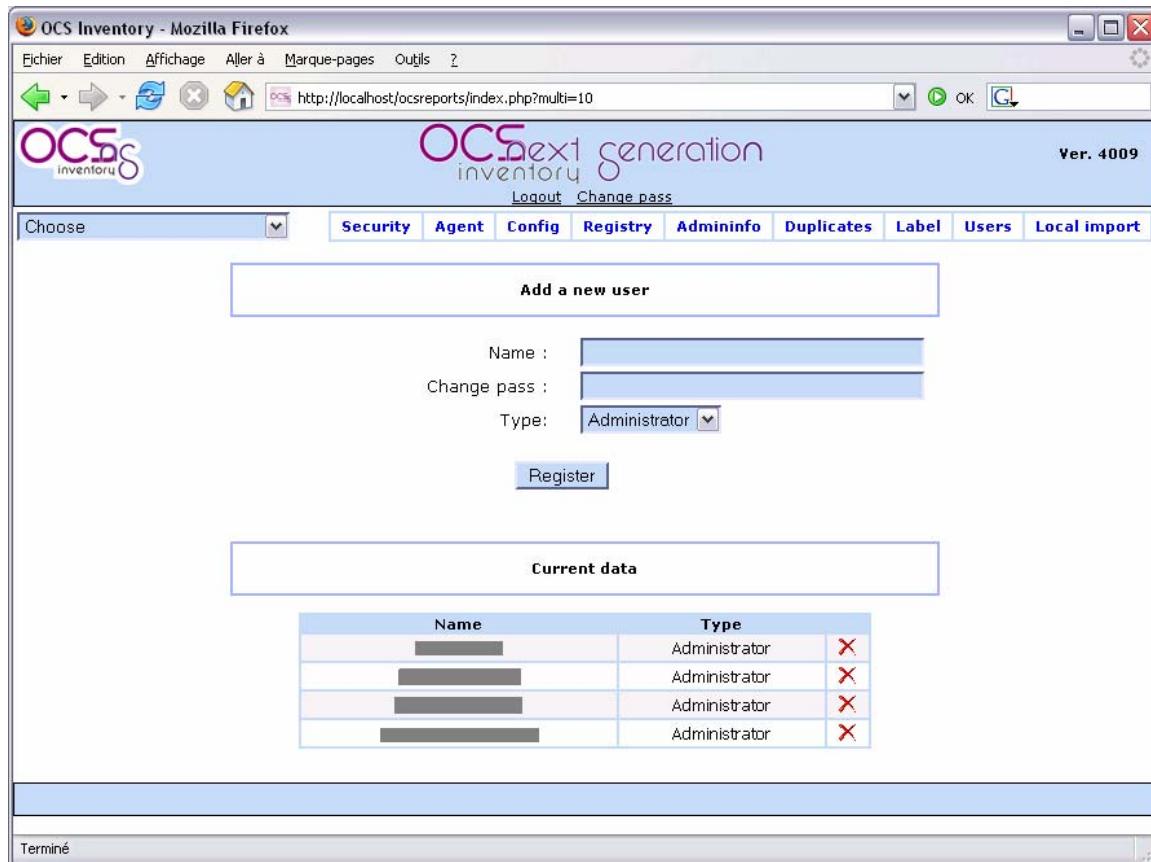

The screenshot shows a Mozilla Firefox browser window displaying the OCS Inventory Next Generation interface. The title bar reads "OCS Inventory - Mozilla Firefox". The address bar shows the URL "http://localhost/ocsreports/index.php?multi=10". The main content area has a blue header with the OCS logo and the text "OCS next generation inventory Ver. 4009". Below the header is a navigation menu with tabs: Choose, Security, Agent, Config, Registry, Admininfo, Duplicates, Label, Users, and Local import. The "Users" tab is selected. A sub-menu titled "Add a new user" is open, containing fields for "Name", "Change pass", and "Type" (set to "Administrator"). Below this is a "Register" button. A "Current data" section displays a table of existing users:

Name	Type
[REDACTED]	Administrator

A status bar at the bottom left says "Terminé".

You can add new users by entering their name, password (user will be able to change it when logged in), and selecting their type. You can choose between:


- ✓ Administrator: user has the ability to configure all parameters of the product.

- ✓ User: user can only query the database and view results of inventory. It just has the top left Combo-box of menu toolbar to run general queries.

To delete a user, just click on red cross at the end of the corresponding line.

5.2 Managing OCS Inventory NG general options.

Click on the toolbar “Config” menu to display all general options.

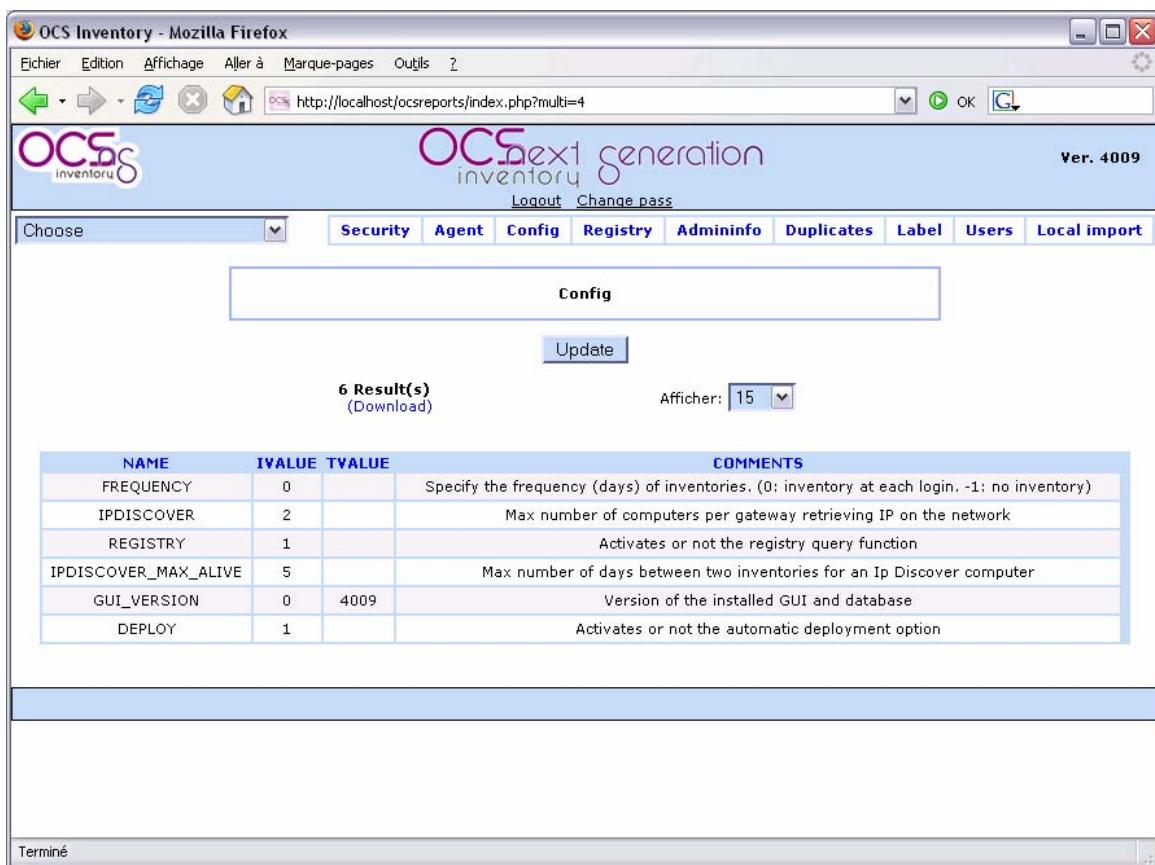

The screenshot shows a Mozilla Firefox browser window displaying the OCS Inventory Next Generation interface. The title bar reads "OCS Inventory - Mozilla Firefox". The address bar shows the URL "http://localhost/ocsreports/index.php?multi=4". The main content area features the "OCS next generation inventory" logo and navigation links for "Logout" and "Change pass". A toolbar below the logo includes "Choose", "Security", "Agent", "Config", "Registry", "Admininfo", "Duplicates", "Label", "Users", and "Local import". The "Config" tab is selected, and the sub-section "Config" is displayed. An "Update" button is visible. Below the buttons, it says "6 Result(s)" and "(Download)". A dropdown menu shows "Afficher: 15". A table lists six configuration options:


NAME	IVALUE	TVALUE	COMMENTS
FREQUENCY	0		Specify the frequency (days) of inventories. (0: inventory at each login, -1: no inventory)
IPDISCOVER	2		Max number of computers per gateway retrieving IP on the network
REGISTRY	1		Activates or not the registry query function
IPDISCOVER_MAX_ALIVE	5		Max number of days between two inventories for an Ip Discover computer
GUI_VERSION	0	4009	Version of the installed GUI and database
DEPLOY	1		Activates or not the automatic deployment option

At the bottom of the page, a status bar says "Terminé".

Each option can have an integer value (field “IVALUE”) or a string value (field “TVALUE”).

Actually, no option use a string value, but perhaps in the future?

You can change the value of each option by clicking the “Update” button.

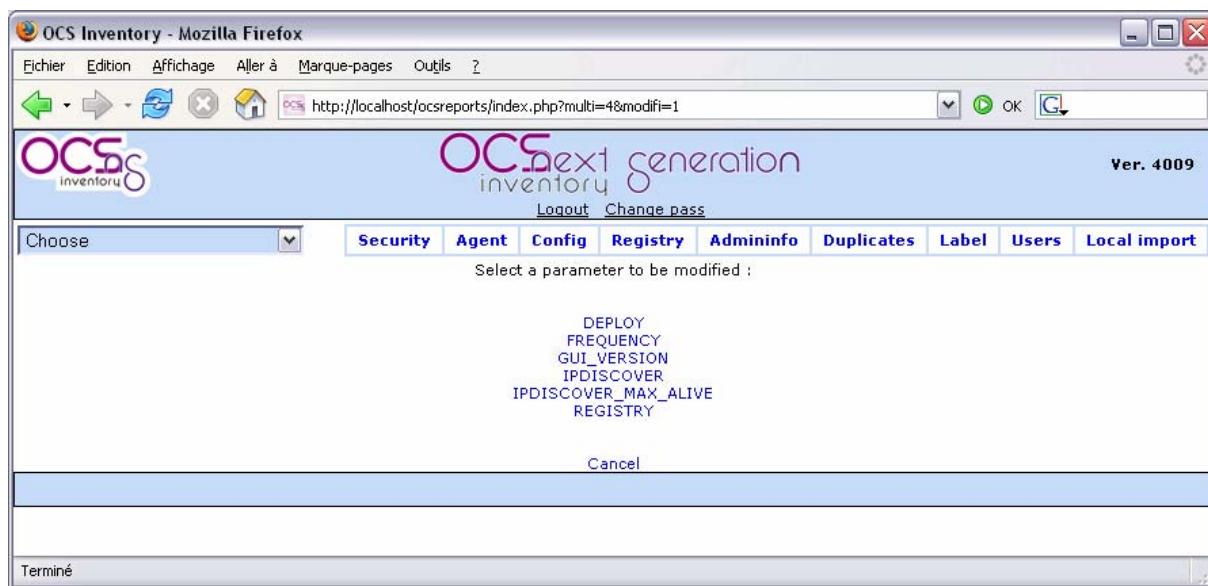

Then click on the option name you want to update, click “Cancel” button to return to view only mode.

- ✓ DEPLOY: Activates (IVALUE = 1) or not (IVALUE = 0) the automatic deployment of new agent release option.
- ✓ FREQUENCY: Specify the frequency in days of inventories. Specific IVALUE field are 0 to run inventory at each login and -1 to disable inventory.
- ✓ IPDISCOVER: Specify the number (IVALUE field) of agent to ask running IP discovery feature for each gateway (sub network). If you leave the default value 2, this mean that the Communication server will ask the 2 most active computers of each sub network to run IP discovery feature.
- ✓ IPDISCOVER_MAX_ALIVE: Maximum number of days between two inventories for an IP Discovery enabled computer to hold his status of IP discovery computer (IVALUE field). An IP discovery enabled computer will lose his status if it has not been seen by the Communication server for more days than the number of days defined in this setting. Another computer in the same sub network will then be designated.
- ✓ REGISTRY: Activates (IVALUE = 1) or not (IVALUE = 0) the registry query function

5.3 Using Registry Query feature.

OCS Inventory NG agent for Windows is able to query the registry of inventoried computers for a value of a key or for all values of a key under registry hives HKEY_CLASSES_ROOT, HKEY_CURRENT_USER, HKEY_LOCAL_MACHINE, HKEY_USERS, HKEY_CURRENT_CONFIG (and HKEY_DYN_DATA for Windows 9X based computers).

You have to enable this feature in the general settings by specifying IVALUE field to 1 (0 to disable) for option “REGISTRY”.

You can then define your registry query by clicking “Registry” toolbar menu.

The screenshot shows a Mozilla Firefox browser window displaying the OCS Inventory Next Generation web interface. The URL in the address bar is <http://localhost/ocsreports/index.php?multi=5>. The main header reads "OCS Next Generation inventory Ver. 4009". Below the header, there is a navigation menu with tabs: Choose, Security, Agent, Config, Registry, Admininfo, Duplicates, Label, Users, and Local import. The "Registry" tab is selected. A sub-header "Registry requests" is visible. Below it, there is a message "1 Result(s) (Download)" and a dropdown menu set to "Afficher: 15". A table displays one result row:

name	regtree	regkey	regvalue
HKLM\Software\Microsoft\Windows\CurrentVersion\Run	2	Software\Microsoft\Windows\CurrentVersion\Run	*

At the bottom of the table are buttons for "Add", "Update", and "Delete". A status message "Terminé" is at the very bottom.

Click “Add” button to add a new query. Enter a name for this query, for example MS Office XP if you want to retrieve MS Office XP registration number, select the registry hive (HKEY_LOCAL_MACHINE in this example), enter the registry key (SOFTWARE\Microsoft\Office\10.0\Registration\{9011040C-6000-11D3-8CFE-0050048383C9}) and the value name to query (ProductID) and validate. Put star (*) in field “Name of the key” to get all values of the key (This is useful to get all values of key “HKLM\Software\Microsoft\Windows\CurrentVersion\Run” to know which process are automatically started for example).

The screenshot shows the 'Registry requests' dialog box. The 'Name (you choose)' field contains 'MS Office XP'. The 'Registry hive' dropdown is set to 'HKEY_LOCAL_MACHINE'. The 'Path of the key (Ex: SOFTWARE\Mozilla)' field contains 'SOFTWARE\Microsoft\Office\10.0\Registration'. The 'Name of the key that will be read (* for all)' field contains 'ProductID'. At the bottom, there are 'Send' and 'Cancel' buttons, and a status bar at the bottom right says 'Terminé'.

The screenshot shows the 'Registry requests' dialog box. The 'Name (you choose)' field contains 'HKLM-SOFTWARE-MICROSOFT-WINDOW'. The 'Registry hive' dropdown is set to 'HKEY_LOCAL_MACHINE'. The 'Path of the key (Ex: SOFTWARE\Mozilla)' field contains 'RUN\Microsoft\Windows\CurrentVersion\Run'. The 'Name of the key that will be read (* for all)' field contains 'Run'. At the bottom, there are 'Send' and 'Cancel' buttons, and a status bar at the bottom right says 'Terminé'.


After that, each time a Windows client connects; it will retrieve and store all the values corresponding to these keys.

5.4 Managing duplicates computers.

OCS Inventory NG is able to detect a renamed computer, reinstalled computer...

Generally, it will handle that alone. But sometimes, it is impossible for the server to know whether two computers are the same or not, for example when it has no network adapter (no Mac address) or when the serial number was not properly set by the constructor (If you change a computer's name, the application won't be able to recognize it if it has no serial or no Mac address, and thus a duplicate fake computer may be created).

This page accessible by clicking “Duplicates” toolbar menu is used to solve this problem (in OCS v3.0 no duplicate detection was implemented).

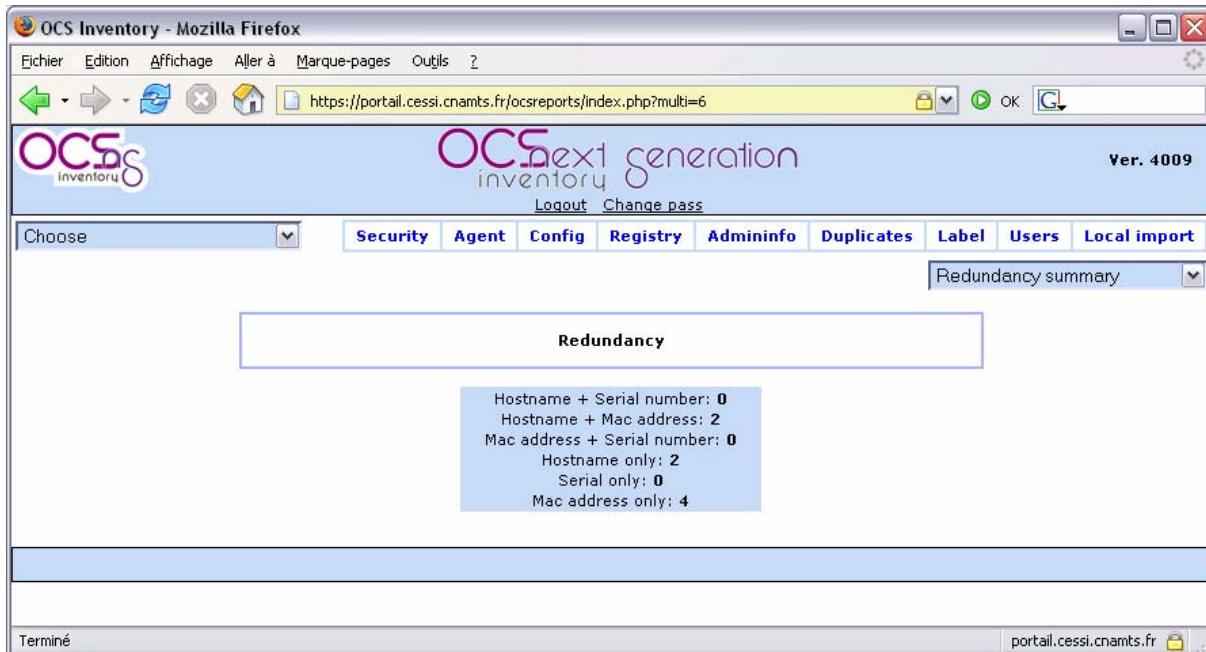

You may choose the kind of comparison you want in the top right combo-box.

- ✓ Redundancy summary – Shows the number of redundant computers detected with each comparison method.
- ✓ “Hostname + Serial number”, “Hostname + Mac address”, “Mac address + Serial number” - These are the two criteria comparison methods, the more reliable. It returns all computers that have two criteria in common.
- ✓ “Hostname only”, “Serial only”, “Mac address only” - These are the one criterion comparison methods; it only shows all computers that shares one parameter.

Once computers are shown, it's up to you to check whether several computers are redundant or not.

The screenshot shows a Mozilla Firefox browser window displaying the OCS Inventory Next Generation interface. The title bar reads "OCS Inventory - Mozilla Firefox". The main header features the "OCS inventory" logo and "OCSnext generation" text, with "Ver. 4009" on the right. A navigation menu at the top includes "Choose", "Security", "Agent", "Config", "Registry", "Admininfo", "Duplicates", "Label", "Users", and "Local import". A dropdown menu shows "Mac address only". Below the menu, a section titled "Redundancy" contains a table with four results. The table columns are: Computer, Serial number, MAC address, Last inventory, User, Tag, Operating system, Ram (MO) (MHz), and winprodid. The data is as follows:

Computer	Serial number	MAC address	Last inventory	User	Tag	Operating system	Ram (MO) (MHz)	winprodid
[checkbox]	N/A	00:01:02:C4:DC:73	12/07/2005 07:03:26	[checkbox]		Microsoft Windows NT 4.0 Server	512 666	50376270225545595095
[checkbox]	550936F	00:06:29:13:7C:3B	12/01/2005 18:55:25	[checkbox]	[checkbox]	Microsoft Windows NT 4.0 Server	512 666	50376270225545595095
[checkbox]	300707890004	00:50:56:C0:00:08	12/05/2005 11:09:31	[checkbox]	[checkbox]	Microsoft Windows XP Professional	735 1196	55711-640-2554075-23400
[checkbox]	22T0T03	00:50:56:C0:00:08	12/07/2005 09:18:14	[checkbox]	[checkbox]	Microsoft Windows XP Professional	1024 2391	55711-640-2554075-23387

A "Merge redundant computers" button is located above the table. At the bottom left, there is a "Terminé" button.

After that, you only have to select (checkbox) computers that look the same, and click “merge redundant computers”: all the data from checked computers will be merged.

The administrative data of the oldest computer are kept on the merged device.

PS: When those filters are applied, some values are filtered out (For example: 'NNNNNNNN' or 'xxxxxxxxxx' for serial number).


5.5 Editing administrative information.

OCS Inventory NG allows you to store custom information for each inventoried computers. For example, you can add administrative information to specify the owner of the computer, or the location of the computer.

This administrative information is stored both on the server and on the client to avoid any loss of data.

For example, if the database is lost, all clients will come back with their administrative information.

You can define the administrative information you want for each computer by clicking “Admininfo” toolbar menu.

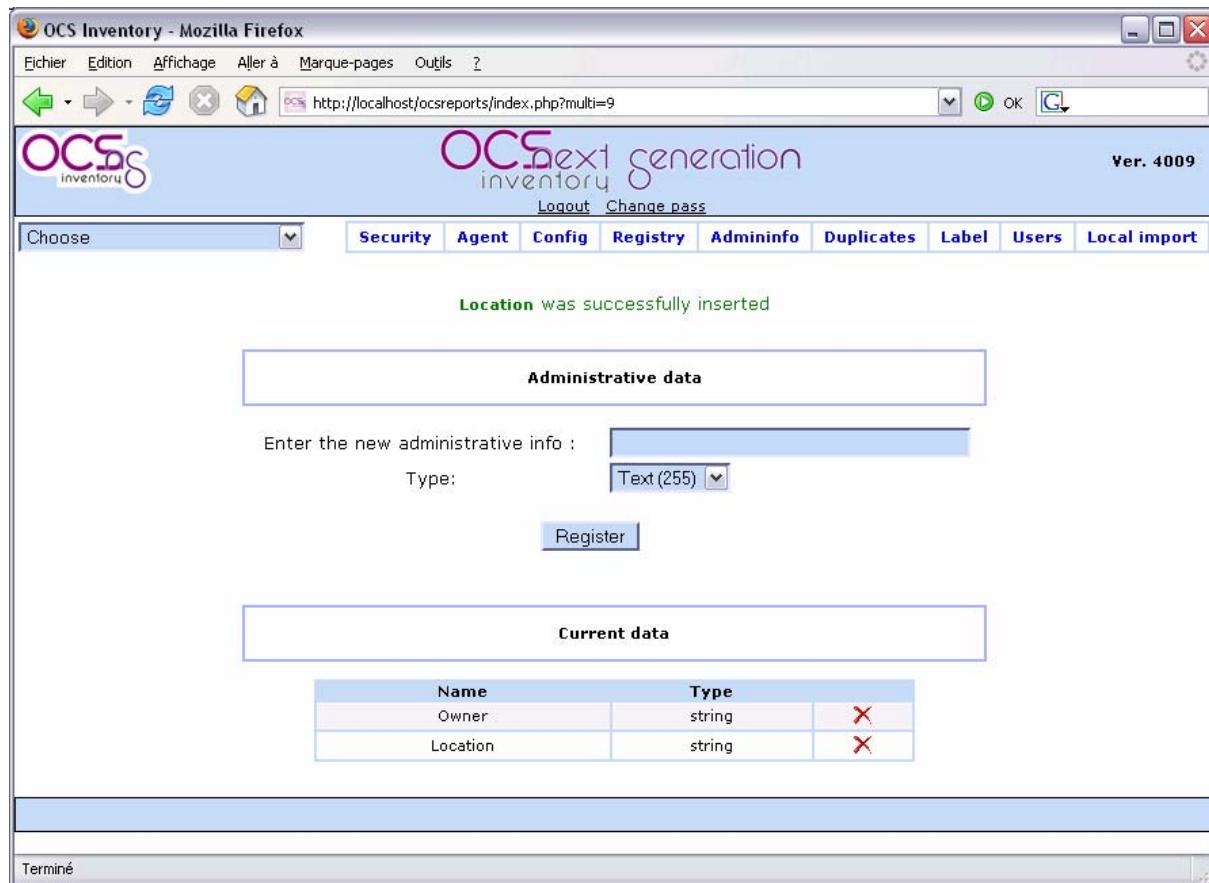

You can add new administrative information definition by entering their name (space or special characters are not allowed) and selecting their type. You can choose type between:

- ✓ Text.
- ✓ Integer.
- ✓ Real.
- ✓ Date.

To delete an administrative information definition, just click on red cross at the end of the corresponding line.

For example, we will add administrative information corresponding to the buy date of computer.

The screenshot shows a Mozilla Firefox browser window displaying the OCS Inventory Next Generation interface. The title bar reads "OCS Inventory - Mozilla Firefox". The address bar shows the URL "http://localhost/ocsreports/index.php?multi=9". The main content area has a header "OCS inventory next generation Ver. 4.009". Below the header are navigation links: "Logout" and "Change pass". A toolbar below the header includes "Choose", "Security", "Agent", "Config", "Registry", "Admininfo", "Duplicates", "Label", "Users", and "Local import". A message "Location was successfully inserted" is displayed in green. A section titled "Administrative data" contains a form field "Enter the new administrative info : BuyDate" with a dropdown menu set to "Date". A "Register" button is present. A section titled "Current data" displays a table:

Name	Type	
Owner	string	X
Location	string	X

A progress bar at the bottom indicates "Terminé".


You can now browse all your computers to set the buy date for each.

5.6 Editing the label

If the “DEPLOY” option is activated, clients may get the “label” file. It is used to fill the popup shown on first start of a client.

This popup asks for the “TAG” value that is used to class computers (it may be, for example, a unit code, the name of one of your company’s section, a street number etc.)

This “label” file is generated during the server install, and may be edited by clicking “Label” toolbar menu.

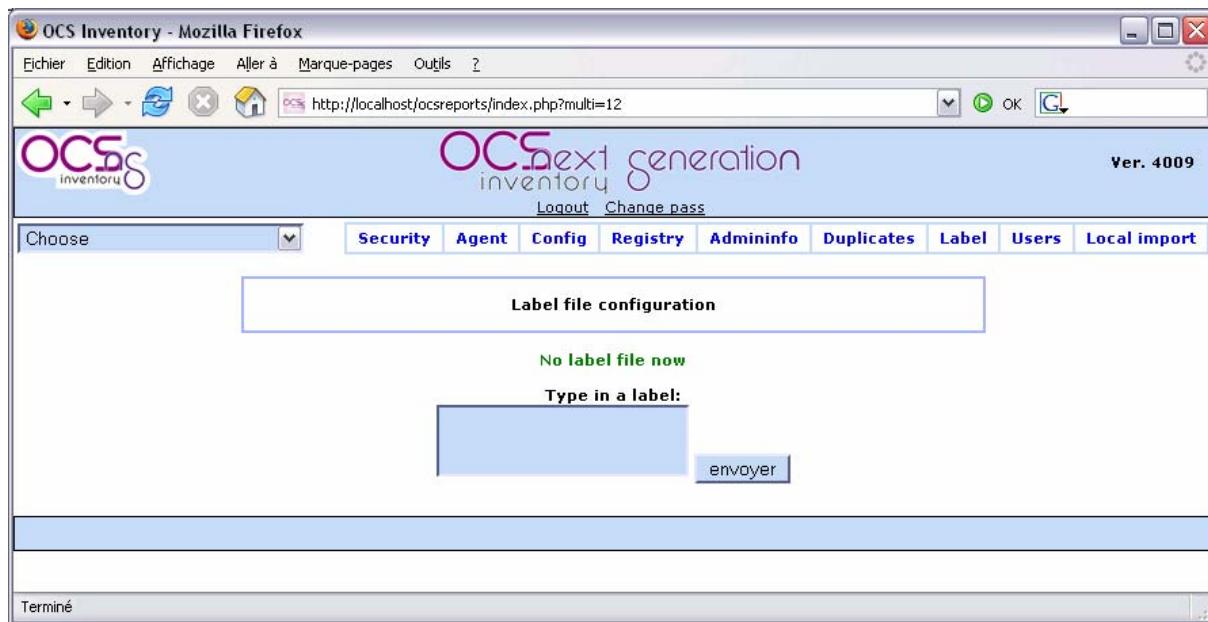

If you submit a blank label, the label file will be deleted, and no window will be displayed anymore on client's computer.

5.7 Deploying automatically a new release of agent.


This feature works only for network connected computers able to connect to the Communication server.

NB: ZIP support in PHP is required to upload new release of Windows agent (see § 8.2.2 ZIP support). PHP request content length must also be at least 4 MB (see § 8.2.1 Requested content-length).

OCS Inventory NG is able to automatically deploy agent updates on inventoried computers from the Communication server.

You just have to upload the new release of agent into the database and to activate the deployment feature by setting the IVALUE of “DEPLOY” general option to 1 (see § 5.2 Managing OCS Inventory NG general options.).

Click “Agent” toolbar menu, browse your hard drive to select the new agent release and click “send” button.

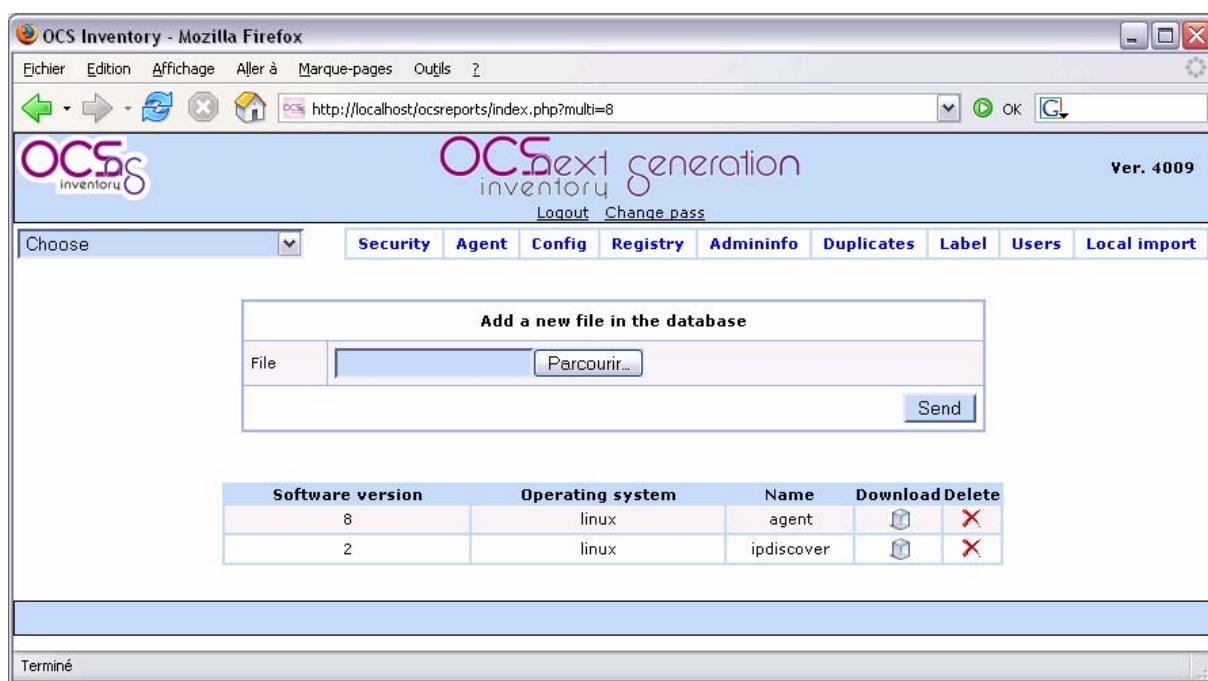

Uploaded file must be one of the following:

- ✓ A zip file for Windows agent (use OCS-NG-AGENT-UPDATE-XXX.zip package)
- ✓ A .pl file for Linux agent (select ocsinventory-client-XX.pl from Linux client package)
- ✓ A binary file (Any binary like dmidecode)

Version: The client must be a different version than the available ones. To know the .pl version, the interface looks for the “use constant VERSION” declaration in the script. For Windows, the “ver” file contains this information.

The deployed clients will be updated with the higher version available, providing this version is different than the current one. Clients will test the updated version and will replace themselves with only if it WORKS.

NB: If you encounter error while uploading agent, refer to common errors § 8.2.1 Requested content-length)

5.8 Importing inventory for non network connected computers.

5.8.1 With Administration server through your web browser

For non network connected computers, you can import inventory results from a file created on the computer by the agent run in local mode (see § 4 Setting up agent on client computers.).

We assume that you're able to save this file in your hard disk from your mailbox, or any other way.

Click “Local import” toolbar menu, browse your hard drive to select the “.ocs” file created by agent release and click “send” button.



5.8.2 With Communication server through a Perl script

Communication server provides the ability to import inventory from a file created on the computer. This file has “.ocs” extension.

We assume that administrator can get the file from somewhere, his mailbox, a USB drive or any other place.

Go to the directory where you've installed Communication server, “/usr/local/ocsinventory-NG” for us, and run the script “Ocsinventory_local.pl” with path to file which contains inventory results as argument.

This will import inventory results into the database.

```
[root@l1675310Iao ocsinventory-NG]# ./Ocsinventory_local.pl ST32491DL-2005-06-23-10-04-02.ocs
OK for ST32491DL-2005-06-23-10-04-02.ocs
-----
Successfully inventoried : 1
Errors : 0
:-)
```

Figure 7 : Sample import of a single inventory results file.

If you have multiple files to import, you can put them in a directory and then launch the script “Ocsinventory_local.pl” without argument, but within the directory where resides files to import.

```
[root@l16753101aa0 home]# /usr/local/ocsinventory-NG/Ocsinventory_local.pl
OK for ST32491DL-2005-06-23-10-04-02.ocs
-----
Successfully inventoried : 1
Errors : 0
:-)
```

Figure 8 : Sample of multiple inventory results files in directory home.

5.9 Using IP discovery feature.

IP discovery feature allow OCS Inventory NG to discover all network connected devices on the network.

For this, Communication server asks a number of most “active” computers running OCS Inventory NG agent to scan for MAC addresses in their sub network at each run. **They will not scan the entire wide area network, but only their local network defined by the couple IP address/subnet mask.**

5.9.1 Introduction.

Inventory software is very useful for administrator. It allows “enlightening” his computers stock. Today, with use of TCP/IP, we can say that enlightenment is done at the same time for all the enterprise network, especially if, like OCS Inventory NG, working is natively network based.

But, what about devices which do not send inventory, for many reasons like a forgetting, a lack of cooperation from users? What about from all “alive” devices which cannot run inventory agent (printers, switches, routers, WiFi access points...)? What about computers which do not have to be connected on your network and which are conspicuous for their discretion?

IPDISCOVER try to answer to those problematic. Even if it can work independently, it matches perfectly to OCS structure. As working is based on a communication between all hosts of information system and a central server, it's easy for the server to order at his “subordinate” to make some little tasks, as getting registry key, doing an inventory or retrieving all devices answering on his IP segment.

5.9.2 How does it work ?

5.9.2.1 Retrieving information.

OCS NG system is based on a dialog between agents installed on computers and Apache module on OCS NG server. Exchange is done in compressed XML and allows configuring agent tasks.

When a computer send an inventory result, server try to determine if it needs some other computers (number can be configured) to scan hosts in this sub network. Gateway IP address are used to cartography enterprise network.

If it's needed, server estimate host quality and decide to activate or not host as an ipdiscover enabled computer. In this case, computer will send systematically an inventory, independently of general configuration parameter 'FREQUENCY'.

5.9.2.2 Election mechanism.

Once server has determined that there is a need for the selected gateway, it evaluates the following criteria:

- ✓ OS: operating system must be Windows XP or Windows 2000 (all versions) or Linux.
- ✓ QUALITY: this parameter means the host connection average to the server in days. It is evaluated dynamically by Communication server only when there is more than the number (defined by 'IPDISCOVER' option) of inventoried hosts for a gateway. If current computer sending inventory results has better quality than another IPDISCOVER enabled computer for this gateway, current computer will replace the other one. 'IPDISCOVER' option must be greater than zero to enable this feature!
- ✓ FIDELITY: total connection number to the server of the computer. This number must be at least 3, to allow QUALITY to be computed from representative data.
- ✓ NETMASK: sub network mask. It must describe a maximum of B class IP network (2 first bytes to 255 => 255.255.X.X).
- ✓ LASTDATE: when Communication server compute QUALITY, if it find a host which hasn't sent inventory results from number of days defined by 'IPDISCOVER_MAX_ALIVE' option, it will replace this host by a new one.

5.9.2.3 How do agents work?

Once agent has received order to proceed to discovery of his sub network, it identifies first network interface to use. It tries then to resolve through ARP all IP addresses answering on his segment. All devices answering to the question are stored in XML inventory result and sent to server.

5.9.2.4 Server tuning

When doing a new installation of OCS NG, we understand easily that it requires some times to be ready to enable ipdiscovery feature. It requires some times to grab all gateways and to elect computers for ipdiscovery. As a computer can only be elected if it REALLY provides an inventory, it may be wiser to configure at the beginning ‘FREQUENCY’ option to zero, always generate an inventory. You can increase this value later, when infrastructure will be ready.

Analyzing errors (thought ipdiscover-util.pl used directly or from web interface) will allow you to detect potential problems. More the value of QUALITY will be lesser, more your ipdiscover information will be up to date.

System will be giving you the best in a domain, with a daily authentication and inventory. Tests done with this configuration on 20 000 hosts and 250 sub networks generate a DAILY actualization of 15 000 IP addresses.

To finish, value set for IPDISCOVER will tell to server how much computers are wished by gateway to run this task (if you set this value to zero, feature will be disabled).

5.9.3 Working with results.


You can view which computers run the IP discovery scans by clicking on toolbar “Security” menu (“IpDisc” menu if some languages).



5.9.3.1 Manage names of your networks.

You may define your sub networks by a name and a unique ID, to view results easily.

Click on “Config” menu and then on “Subnet names” menu to manage your sub networks.

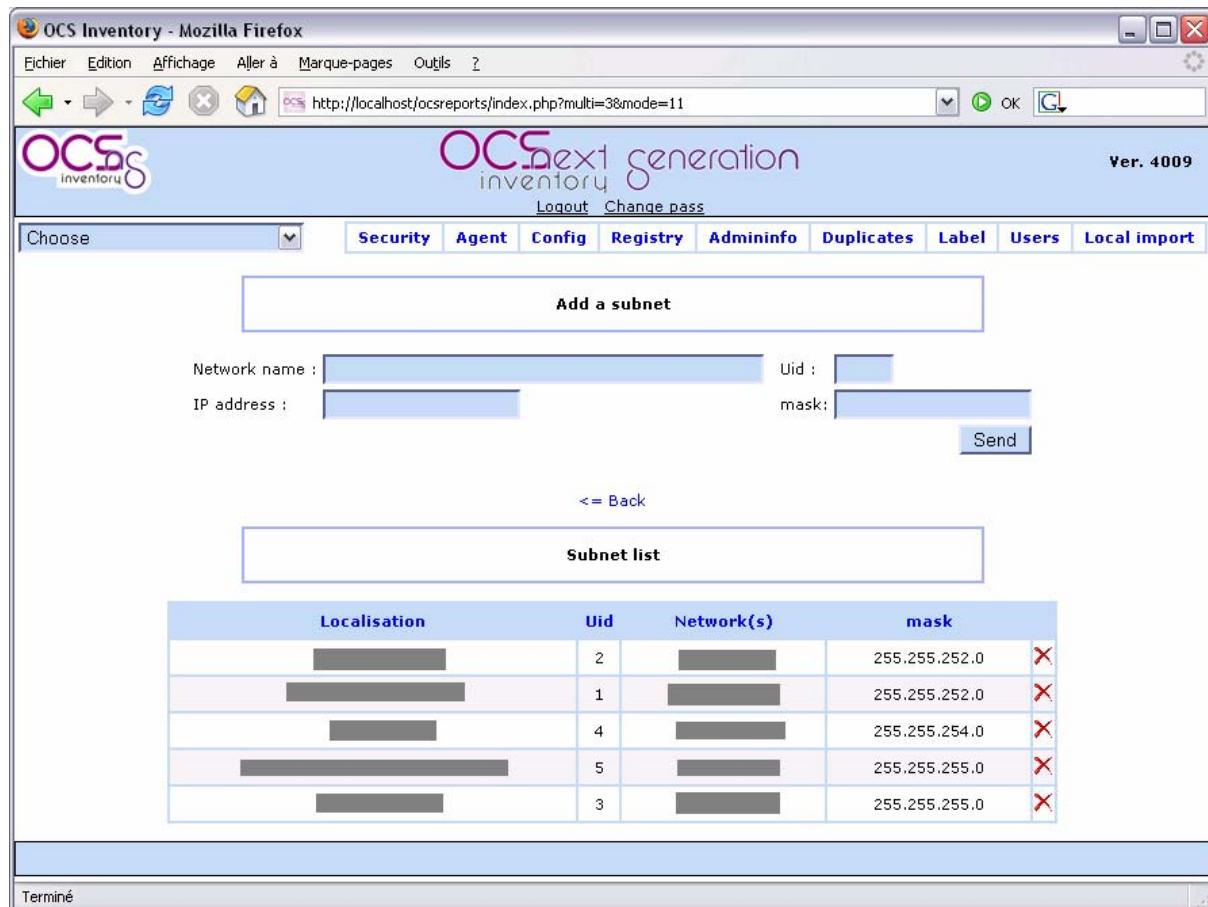

Enter sub network name (ex DMZ), ID, IP address and IP network mask, then click “Send” button to validate.

To remove a sub network definition, just click red cross at the end of corresponding line.

5.9.3.2 Show list of networks

You can view the list of sub network configured in your network by selecting “Network information” menu.

The screenshot shows the OCS Inventory Next Generation web interface. At the top, there's a navigation bar with links like Fichier, Edition, Affichage, Aller à, Marque-pages, Outils, and a search bar. Below the header, the title "OCS next generation inventory" and version "Ver. 4009" are displayed. A menu bar includes Security, Agent, Config, Registry, Admininfo, Duplicates, Label, Users, and Local import. The main content area is titled "Network information" and shows a table with 30 uninventoried network interfaces. The table has columns: Localisation, Uid, Network name, Inventoried, Non-inventoried, IpDiscover, and Identified. The "Network name" column lists network ranges like 169.254.0.0, 192.168.139.0, and 192.168.249.0. The "Inventoried" column shows values like 3, 18, 1, 1, 1, 53, and 1. The "Non-inventoried" column shows values like 0, 3, 0, 0, 0, 26, 0, and 0. The "IpDiscover" column shows values like 2, 1, 0, 1, 2, 0, and 0. The "Identified" column shows values like 0, 0, 0, 0, 0, 0, and 0. At the bottom of the table, a message reads "Terminé".

For each network, you will be able to view how many inventoried hosts, non inventoried hosts, IPDISCOVER feature enabled hosts and identified hosts (known hosts manually registered in the database) are connected to this network.

Click on the number of needed column to view each type of devices.

5.9.3.3 Show inventoried hosts in the network.

You can view the list of inventoried hosts on your network by clicking on number in column “Inventoried” in the network list.

http://localhost - OCS Inventory - Mozilla Firefox

Devices of network [redacted]
[redacted]

53 Result(s) (Download) Afficher: 15 Add column

<< 1 4 >>

Last inventory	Computer	User	Operating system	Ram(MO)	mask	ipgateway	quality	fidelity
12/01/2005 19:37:39	[redacted]	Administrateur	Microsoft Windows 2000 Server	1024	255.255.252.0	[redacted]	0.805	201
12/01/2005 18:37:07	[redacted]	Administrateur	Microsoft Windows 2000 Server	512	255.255.252.0	[redacted]	1.617	123
12/01/2005 18:34:47	[redacted]	Administrateur	Microsoft Windows 2000 Advanced Server	2048	255.255.252.0	[redacted]	1.187	133
12/01/2005 18:30:57	[redacted]	Administrateur	Microsoft Windows 2000 Advanced Server	2048	255.255.252.0	[redacted]	1.436	142
12/01/2005 18:07:55	[redacted]	root/root/root/root/root/root	Linux(redhat)	3010	255.255.252.0	[redacted]	0.000	2
12/01/2005 18:00:37	[redacted]	root	Linux(redhat)	2007	255.255.252.0	[redacted]	1.015	91
12/01/2005 17:59:20	[redacted]	root	Linux(redhat)	248	255.255.252.0	[redacted]	1.052	152
12/01/2005 17:57:39	[redacted]	root	Linux(redhat)	500	255.255.252.0	[redacted]	1.014	159
12/01/2005 17:56:25	[redacted]	root	Linux(redhat)	2514	255.255.252.0	[redacted]	1.117	142
12/01/2005 17:53:51	[redacted]	root	Linux(redhat)	3010	255.255.252.0	[redacted]	1.057	151
12/01/2005 17:53:51	[redacted]	root	Linux(redhat)	3010	255.255.252.0	[redacted]	1.057	151
12/01/2005 17:53:51	[redacted]	root	Linux(redhat)	3010	255.255.252.0	[redacted]	1.057	151
12/01/2005 17:53:51	[redacted]	root	Linux(redhat)	3010	255.255.252.0	[redacted]	1.057	151
12/01/2005 17:36:10	[redacted]	[redacted]	Microsoft Windows XP Professional	512	255.255.252.0	[redacted]	0.320	41

<< 1 4 >>

Terminé

5.9.3.4 Show uninventoried network devices.

You can view the list of active network devices detected with IPDISCOVERY on your network by clicking on number in column “Non inventoried” in the network list.

If there is, in the list, devices you know as legitimate, you can register them so they will not be displayed next time. For this, just click the icon at the end of corresponding line. Before, you may want to register “Device type” to easily identify known hosts (see §5.9.3.8 Registering known hosts.).

5.9.3.5 Show IPDISCOVER enabled hosts.

You can view the list of hosts running IPDISCOVERY feature on your network by clicking on number in column “IpDiscover” in the network list.

http://localhost - OCS Inventory - Mozilla Firefox

Devices of network							
2 Result(s) (Download)		Afficher:	15	Add column			
Last inventory	X	Computer	X	User	X	Operating system	X
12/01/2005 09:47:59						Microsoft Windows XP Professional	
11/29/2005 15:28:04						Microsoft Windows XP Professional	

5.9.3.6 Show known or identified hosts.

You can view the list of known hosts already identified by someone on your network by clicking on number in column “Identified” in the network list.

The screenshot shows a Mozilla Firefox browser window displaying the 'Network devices list of network' page. The page title is 'http://localhost - OCS Inventory - Mozilla Firefox'. At the top, it says '2 Result(s)' with a '(Download)' link and a dropdown menu set to 'Afficher: 15'. Below this is a table with the following columns: MAC address, IP address, ipsubnet, Device type, Device description, and Submitted by. There are two rows of data, both of which are 'Sun Solaris' and have a red 'X' icon in the 'Submitted by' column. The bottom of the page has a status bar that says 'Terminé'.


MAC address	IP address	ipsubnet	Device type	Device description	Submitted by
[REDACTED]	[REDACTED]	[REDACTED]	Sun Solaris	[REDACTED]	X
[REDACTED]	[REDACTED]	[REDACTED]	Sun Solaris	[REDACTED]	X

5.9.3.7 Managing known device types.

You can register devices (such as routers, switches, network printers, computers for which there is no inventory agent...) as you know they are legitimate. As is, they will not be displayed in the list of uninventoried devices, to allow you concentrate on suspicious devices.

You may first define some device types to identify them easily.

Click on “Config” menu to manage your device types.

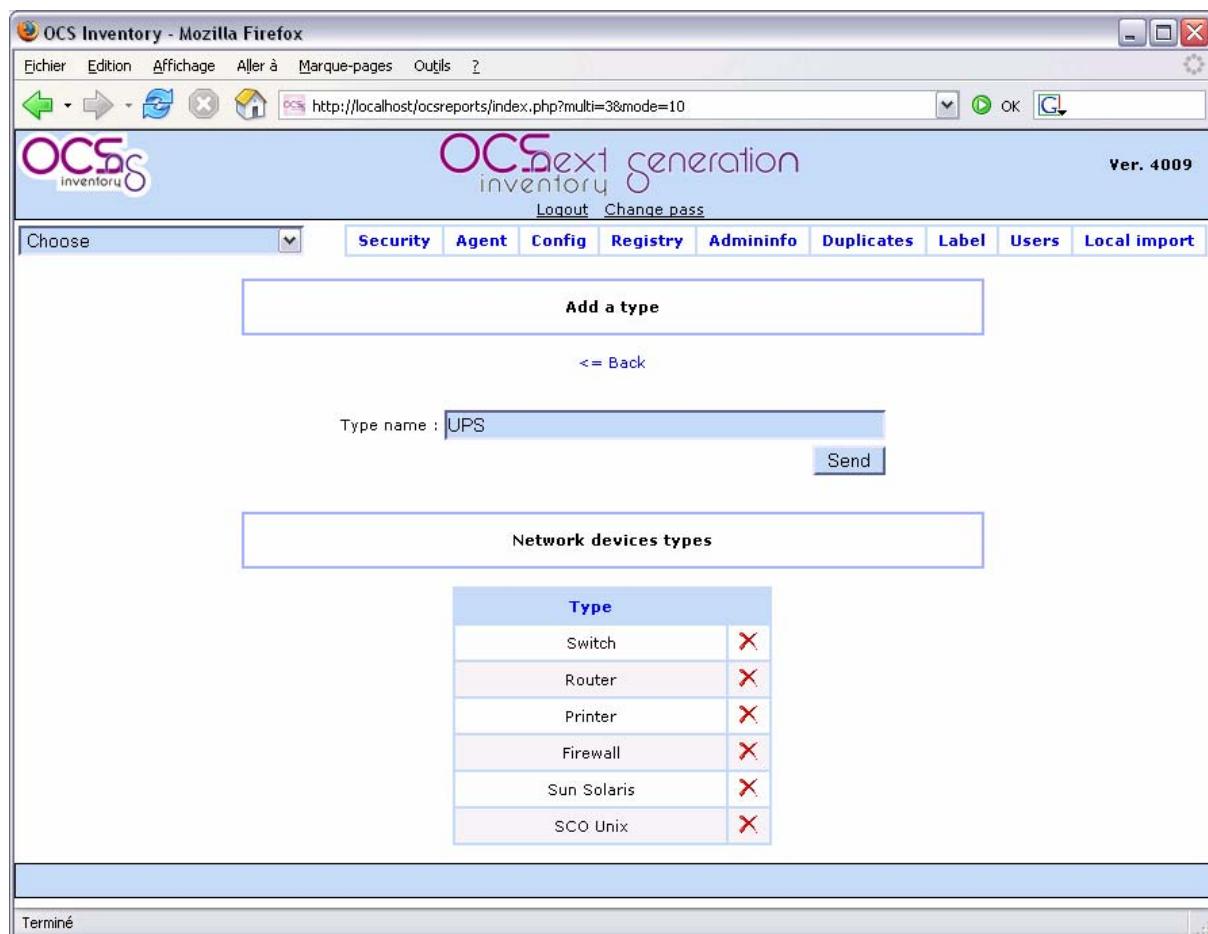

You can add new device type by entering the “Type name” you want and clicking “Send” button.

You can remove any device type by clicking on the red cross at the end of corresponding line.

5.9.3.8 Registering known hosts.

You can add new devices by browsing list of uninventoried devices and clicking the icon at the end of corresponding line. This will bring you to page for adding or removing network devices and “MAC” field will be automatically fill in.

The screenshot shows a Mozilla Firefox browser window with the URL <http://localhost> - OCS Inventory. The page displays a form titled "Add a new network device" with fields for MAC address, Description, and Type (set to "Switch"). Below the form is a table titled "Network devices list of network" showing two results, both of which are Sun Solaris. The table has columns: MAC address, IP address, ipsubnet, Device type, Device description, and Submitted by. Each row in the table has a red "X" icon at the end of the Submitted by column.

MAC address	IP address	ipsubnet	Device type	Device description	Submitted by
[redacted]	[redacted]	[redacted]	Sun Solaris	[redacted]	X
[redacted]	[redacted]	[redacted]	Sun Solaris	[redacted]	X

To remove a network device, just click on the red cross at the end of corresponding line.

5.9.4 Enhancing IPDISCOVERY using ipdiscover-util perl script.

IPDISCOVER-UTIL perl script can only be installed on Linux management server. Management server for Windows does not yet support this utility.

This tool enhances features of web administration server to allow querying uninventoried hosts to try to detect operating system and other characteristics.

All features seen in previous chapter 5.9.3 are still available.

5.9.4.1 Installing ipdiscover-util perl script.

IPDISCOVER-UTIL perl script requires the following components.

- ✓ nmap (tested on 3.75)
- ✓ nmblookup (part of the samba suite, tested on 3.0.7/3.0.10)
- ✓ Perl module Net::IP
- ✓ Perl module DBI
- ✓ Perl module DBD::mysql
- ✓ Perl module XML::Simple

Download “IPDISCOVER-UTIL-1.0XX.tar.gz” from OCS Inventory Web Site.

Unpack it.

- ✓ tar -xvzf IPDISCOVER-UTIL _1.0XX.tar.gz

Move or copy extracted file “ipdiscover-util.pl” to the web administration server directory, usually “/var/www/html/ocsreports” and ensure it’s readable by everyone, but writable only by root.

- ✓ cd ipdiscover-util-1.0b
- ✓ chown root:root ipdiscover-util.pl
- ✓ mv ipdiscover-util.pl /var/www/html/ocsreports

Ensure that your Apache web server account is able to write in directory “/var/www/html/ocsreports” (see § 8.3.1 Files and directories permissions under Linux.).

Now, IPDISCOVER-UTIL perl script is usable by Administration server.

5.9.4.2 Scanning an IP address

You can scan query specific IP address to obtain information about the host. Go to “Security” menu and click on “IP querying” menu and then enter IP address, network mask and click “Send” button.



IPDISCOVER-UTIL perl script will use NMAP and NMBLOOKUP utilities to get information about the host (DNS name, NetBios name...) and also show if host is inventoried and/or discovered.

The screenshot shows a Mozilla Firefox browser window displaying the OCS Inventory Next Generation interface. The title bar reads "OCS Inventory - Mozilla Firefox". The address bar shows the URL "https://[REDACTED]/ocsreports/index.php?multi=3&mode=7". The main header features the "OCS inventory" logo and "Ver. 4009". A navigation menu at the top includes "Choose", "Security", "Agent", "Config", "Registry", "Admininfo", "Duplicates", "Label", "Users", and "Local import". Below the menu, a section titled "Ip querying" contains fields for "IP address" (set to "[REDACTED]") and "mask" (set to "255.255.254.0"), with a "Send" button. A table titled "Computer details" (mask: 255.255.254.0) displays the following information:

Computer details (mask: 255.255.254.0)	
Discovered:	yes
Inventoried:	yes
Type:	Computer
DNS name:	-
NetBIOS Name:	
Network name:	-
Network number:	[REDACTED]

At the bottom of the interface, a status bar says "Terminé".

5.9.4.3 Analyzing uninventoried hosts

When you show list of uninventoried devices detected by IPDISCOVERY feature, you can now analyze of hosts to grab information about them.

The screenshot shows a Mozilla Firefox browser window with the URL <https://portail.cessi.cnamts.fr>. The page title is "OCS Inventory - Mozilla Firefox". At the top, there is a "Subnet" input field containing a redacted IP address and an "ANALYZE" button. Below the button is a table with the following columns: IP address, MAC address, DNS name, Date, and Register. The table contains 15 rows of data, each with a redacted IP address and MAC address, and a DNS name of "-" or a redacted domain. The Date column shows various dates from December 2005 to January 2006. The Register column contains icons for each row. At the bottom left of the table area, it says "Terminé".

IP address	MAC address	DNS name	Date	Register
[REDACTED]	[REDACTED]	-	2005-12-07 03:49:57	[ICON]
[REDACTED]	[REDACTED]	[REDACTED]	2005-12-07 03:49:57	[ICON]
[REDACTED]	[REDACTED]	[REDACTED]	2005-12-07 03:49:57	[ICON]
[REDACTED]	[REDACTED]	[REDACTED]	2005-12-07 03:49:57	[ICON]
[REDACTED]	[REDACTED]	[REDACTED]	2005-12-07 03:49:57	[ICON]
[REDACTED]	[REDACTED]	[REDACTED]	2005-12-07 03:49:57	[ICON]
[REDACTED]	[REDACTED]	[REDACTED]	2005-12-07 03:49:57	[ICON]
[REDACTED]	[REDACTED]	-	2005-12-07 03:49:57	[ICON]
[REDACTED]	[REDACTED]	[REDACTED]	2005-12-07 03:49:57	[ICON]
[REDACTED]	[REDACTED]	-	2005-12-07 03:49:57	[ICON]
[REDACTED]	[REDACTED]	-	2005-12-01 17:14:23	[ICON]
[REDACTED]	[REDACTED]	[REDACTED]	2005-12-07 03:49:57	[ICON]
[REDACTED]	[REDACTED]	-	2005-12-07 03:49:57	[ICON]
[REDACTED]	[REDACTED]	-	2005-12-01 17:14:23	[ICON]
[REDACTED]	[REDACTED]	-	2005-12-06 03:50:06	[ICON]
[REDACTED]	[REDACTED]	-	2005-12-07 03:49:57	[ICON]
[REDACTED]	[REDACTED]	-	2005-12-01 17:14:23	[ICON]
[REDACTED]	[REDACTED]	-	2005-12-07 03:49:57	[ICON]

You may also analyze this network by clicking “Analyze” button. IPDISCOVER-UTIL perl script will be used to determine, for each network device, his NetBios name or DNS name and the type of operating system.

The following types are used:

- ✓ **Windows**: host seems to run one version of Microsoft Windows operating system.
- ✓ **Linux**: host seems to run under Linux operating system.
- ✓ **Network**: operating system cannot be determined, so it can be network device such as router, managed switch, printer, or host running Sun Solaris or IBM AIX... Maybe, host is running some firewall software?
- ✓ **Phantom**: host is not responding at this time. Maybe it is powered off or there is a firewall ?

https://portail.cessi.cnamts.fr - OCS Inventory - Mozilla Firefox

HOSTS EVALUATED AS WINDOWS				
IP address	MAC address	DNS name/NetBIOS	Date	Register
[REDACTED]	[REDACTED]	[REDACTED]	2005-12-07 03:49:57	

HOSTS EVALUATED AS LINUX				
IP address	MAC address	DNS name/NetBIOS	Date	Register
[REDACTED]	[REDACTED]	[REDACTED]	2005-12-07 03:49:57	
[REDACTED]	[REDACTED]	-	2005-12-07 03:49:57	

HOSTS EVALUATED AS NETWORK				
IP address	MAC address	DNS name/NetBIOS	Date	Register
[REDACTED]	[REDACTED]	[REDACTED]	2005-12-07 03:49:57	
[REDACTED]	[REDACTED]	[REDACTED]	2005-12-07 03:49:57	
[REDACTED]	[REDACTED]	[REDACTED]	2005-12-07 03:49:57	
[REDACTED]	[REDACTED]	-	2005-12-07 03:49:57	
[REDACTED]	[REDACTED]	[REDACTED]	2005-12-07 03:49:57	
[REDACTED]	[REDACTED]	[REDACTED]	2005-12-07 03:49:57	
[REDACTED]	[REDACTED]	-	2005-12-07 03:49:57	
[REDACTED]	[REDACTED]	-	2005-12-07 03:49:57	
[REDACTED]	[REDACTED]	-	2005-12-07 03:49:57	

HOSTS EVALUATED AS PHANTOM				
IP address	MAC address	DNS name/NetBIOS	Date	Register
[REDACTED]	[REDACTED]	-	2005-12-07 03:49:57	

Terminé

If a network device is legitimate, you can register it by clicking on icon “Register” at the end of corresponding line. You will be able to enter a brief description and to select network device type while registering it (see § 5.9.3.8 Registering known hosts.).

6 Querying inventory results.

Point your browser to the URL “http://administration_server/ocsreports” and login in.

The screenshot shows a Mozilla Firefox browser window displaying the OCS Inventory Next Generation interface. The title bar reads "OCS Inventory - Mozilla Firefox". The address bar shows the URL "http://localhost/ocsreports/index.php". The main header features the "OCS inventory" logo and "OCS next generation" text, with "Ver. 4009" in the top right. A navigation menu at the top includes "All computers", "Security", "Agent", "Config", "Registry", "Admininfo", "Duplicates", "Label", "Users", and "Local import". Below the menu, a search bar displays "All computers". A message indicates "77 Result(s) (Download)". The results table has columns: Tag, Last inventory, Computer, User, Operating system, and Ram(MO). The table lists 15 rows of computer data, each with a red 'X' icon in the last column. The bottom of the page shows the URL "http://localhost/ocsreports/index.php?multi=9".

Tag	Last inventory X	Computer X	User X	Operating system X	Ram(MO) X
[redacted]	12/01/2005 19:37:39	[redacted]	[redacted]	Microsoft Windows 2000 Server	1024 X
[redacted]	12/01/2005 19:01:37	[redacted]	[redacted]	Microsoft Windows NT 4.0 Server	384 X
[redacted]	12/01/2005 18:55:25	[redacted]	[redacted]	Microsoft Windows NT 4.0 Server	512 X
[redacted]	12/01/2005 18:48:19	[redacted]	[redacted]	Microsoft Windows 2000 Server	1024 X
[redacted]	12/01/2005 18:47:01	[redacted]	[redacted]	Microsoft Windows 2000 Server	1024 X
[redacted]	12/01/2005 18:45:18	[redacted]	[redacted]	Microsoft Windows 2000 Server	1280 X
[redacted]	12/01/2005 18:40:37	[redacted]	[redacted]	Microsoft Windows 2000 Server	1024 X
[redacted]	12/01/2005 18:37:07	[redacted]	[redacted]	Microsoft Windows 2000 Server	512 X
[redacted]	12/01/2005 18:34:47	[redacted]	[redacted]	Microsoft Windows 2000 Advanced Server	2048 X
[redacted]	12/01/2005 18:30:57	[redacted]	[redacted]	Microsoft Windows 2000 Advanced Server	2048 X
[redacted]	12/01/2005 18:15:07	[redacted]	[redacted]	Microsoft Windows XP Professional	1024 X
[redacted]	12/01/2005 18:07:55	[redacted]	[redacted]	Linux(redhat)	3010 X

You must use top left combo-box to run predefined queries.

6.1 All computers.

This query will allow you to display all inventoried computers. Just click on a computer name to open his properties in a new browser window.

The screenshot shows a Mozilla Firefox window displaying a machine report from the OCS inventory system. The top navigation bar includes File, Edition, Affichage, Aller à, Marque-pages, Outils, and a Help icon. The address bar shows the URL: http://localhost/ocsreports/machine.php?sessionid=4ddd522ac4521848de7b91b9a0c42ab8&system.

General Machine Information:

Name:	[REDACTED]	OS Name:	Microsoft Windows 2000 Server
Domain:	[REDACTED]	OS Version:	5.0.2195
Last inventory:	2005-12-01 18:45:18	Service pack:	Service Pack 4
IP address:	[REDACTED]	Comments:	[REDACTED]
User:	[REDACTED]	Windows user:	[REDACTED]
Memory:	1280	Windows licence:	[REDACTED]
Swap:	3051	User agent:	OCS-NG_windows_client_v4009
Network name 1:	[REDACTED]		
Network name 2:	[REDACTED]		

Description: [REDACTED]

Administrative data: [REDACTED] (links to Processor(s), Memory(s), Storage, Disk(s), BIOS, Sound, Video card, Input devices, Monitor(s), Network(s), Port(s), Printer(s), Controller(s), Slot(s), Software, Modem(s), Registry)

Processor(s):

Type	CPU Speed (MHz)	Number
Intel(R) Pentium(R) III CPU family 1400MHz	1393	2

Memory:

Caption	Description	Capacity (MB)	Purpose	Type	CPU Speed (MHz)	Slot number
Mémoire physique	J1 (Multi-bit ECC)	128	System Memory	SDRAM	N/A	1
Mémoire physique	J4 (Multi-bit ECC)	128	System Memory	SDRAM	N/A	2
Mémoire physique	J2 (Multi-bit ECC)	512	System Memory	SDRAM	N/A	3
Mémoire physique	J3 (Multi-bit ECC)	512	System Memory	SDRAM	N/A	4

Terminé

- ✓ Top banner - Display the general information for the current device
- ✓ Links section – Just click on the appropriate link to display the corresponding information.
- ✓ Bottom section – Use “show everything” to display all sections. To print the currently displayed information, use “print this page”.
- ✓ Special section Administrative data – Use this section to display the administrative information of the device. This page fits with your settings in “admininfo” tab. Use the “update” button to change values.

6.2 TAG / number of PC repartition.

This query allow you to display all machine grouped by TAG account info. Click on the computers count to retrieve the corresponding devices.

For example, if you've choose to set your TAG information to reflect your geographical sites, this will display the number of computer in each different site.

6.3 Search with various criteria.

This query allows you to search for computers having specific feature.

The screenshot shows the OCS Inventory - Mozilla Firefox interface. At the top, there's a menu bar with French options: Fichier, Edition, Affichage, Aller à, Marque-pages, Outils, and ?. Below the menu is a toolbar with icons for back, forward, stop, refresh, and search. The address bar shows the URL: http://localhost/ocsreports/index.php?multi=1. The main header features the OCS inventory logo and the text "OCS next generation" and "Ver. 4009". Below the header is a navigation menu with tabs: Security, Agent, Config, Registry, Admininfo, Duplicates, Label, Users, and Local import. A dropdown menu labeled "Search with various criteria" is open. The central part of the screen is a search form titled "Search with various criteria". It contains a table with eight rows, each representing a search parameter. The columns are: "Choose a parameter:" (dropdown menu), "Choose" (button), and "Reset" (button). The parameters listed are: Enabled (checkbox checked), BIOS Manufacturer (operator EQUALS, value field empty), Enabled (checkbox unchecked), Gateway (operator EQUALS, value field empty), Enabled (checkbox checked), Manufacturer (operator EQUALS, value field empty), Enabled (checkbox unchecked), Memory (operator EQUALS, value field containing "MO"), Enabled (checkbox checked), Model (operator EQUALS, value field empty), Enabled (checkbox unchecked), Monitor serial (operator EQUALS, value field empty), Enabled (checkbox checked), Operating system (operator EQUALS, value field containing "Linux"), and Enabled (checkbox unchecked), Serial number (operator EQUALS, value field empty). At the bottom of the search form is a "Search" button. A note below the table says "Jokers: ? (one character), * (several characters)". The status bar at the bottom left says "Terminé".

You can add new parameter to the search by dropping down the combo-box and selecting him in the list.

Default search parameters are:

- ✓ BIOS Manufacturer
- ✓ CPU Speed
- ✓ Computer name
- ✓ Domain
- ✓ Gateway
- ✓ IP Address
- ✓ Last inventory
- ✓ Memory
- ✓ Model
- ✓ Monitor serial

- ✓ Network number
- ✓ Operating system
- ✓ Registry key value
- ✓ Serial number
- ✓ Software (1)
- ✓ Software (2)
- ✓ Tag value
- ✓ User logged in
- ✓ User agent (show OCS NG agent version)
- ✓ And all the administrative information you've defined.

For each parameter, you can use one of the following comparison operators, depending of the parameter you've selected:

- ✓ EQUAL
- ✓ DIFFERENT
- ✓ SMALLER
- ✓ BIGGER
- ✓ BETWEEN
- ✓ OUT OF

NB: Don't forget to enable the parameter in the search!

OCS Inventory - Mozilla Firefox

Fichier Edition Affichage Aller à Marque-pages Outils ?

Logout Change pass

Search with various criteria

SECURITY Agent Config Registry Admininfo Duplicates Label Users Local import

Search with various criteria

10 Result(s) (Download) Afficher: 15 Add column

Tag	Last inventory X	Computer X	User X	Operating system X	Ram(MO) X
[REDACTED]	12/01/2005 19:01:37	[REDACTED]	[REDACTED]	Microsoft Windows NT 4.0 Server	384 X
[REDACTED]	12/01/2005 18:55:25	[REDACTED]	[REDACTED]	Microsoft Windows NT 4.0 Server	512 X
[REDACTED]	12/01/2005 17:29:15	[REDACTED]	[REDACTED]	Microsoft Windows 98	510 X
[REDACTED]	12/01/2005 10:06:04	[REDACTED]	[REDACTED]	Microsoft Windows 98	510 X
[REDACTED]	11/30/2005 17:55:07	[REDACTED]	[REDACTED]	Microsoft Windows 98	510 X
[REDACTED]	11/21/2005 11:01:18	[REDACTED]	[REDACTED]	Microsoft Windows XP Professional	255 X
[REDACTED]	11/15/2005 12:21:52	[REDACTED]	[REDACTED]	Microsoft Windows 98	510 X
[REDACTED]	11/10/2005 11:55:39	[REDACTED]	[REDACTED]	Microsoft Windows NT 4.0 Workstation	254 X
[REDACTED]	10/27/2005 09:32:32	[REDACTED]	[REDACTED]	Microsoft Windows 98	511 X
[REDACTED]	08/29/2005 19:10:49	[REDACTED]	[REDACTED]	Microsoft Windows NT 4.0 Server	256 X

Choose a parameter:

<input checked="" type="checkbox"/> Enabled	CPU Speed (MHz)	SMALLER <input type="button" value="1024"/> --
		MHZ
<input checked="" type="checkbox"/> Enabled	Memory	BETWEEN <input type="button" value="128"/> --
		768 MO

http://localhost/ocsreports/machine.php?sessionid=4dd522ac4521848de7b91b9a0c42ab8&systemid=PT88548MG5-2005-10-26-11-21-18

7 Management server tuning.

OCS Inventory NG management server needs some tuning to support the load of a large number of inventoried computers. Performances are just limited by the hardware configuration (especially the amount of RAM, processor is not very loaded) of computer hosting the 3 main components:

- ✓ MySQL database server.
- ✓ Communication server.
- ✓ Administration server.

For example, our production server manages more than 60 000 clients. For this, we have 2 servers running Linux Debian, one for the database server and one for the Communication and Administration server. Hardware configuration for both servers is the following:

- ✓ 1 Intel Pentium 4 2,8 GHz.
- ✓ 1,5 GB RAM

Because of the amount of available RAM, we have to limit the number of simultaneous HTTP connection to Communication and Administration server to 200.

You must keep an eye on Apache web server logs for Communication server to detect any problems. Also, check Communication server log file in directory “/var/log/ocsinventory-NG”.

If you want to limit the number of simultaneous connections, you must update the “MaxClients” in Apache configuration file, usually “/etc/httpd/conf/httpd.conf”.

Also, MySQL database server is limited by default to 100 simultaneous connections. So, if the Communication server handles more than 100 simultaneous requests for inventory, it will not be able to answer all. You can upgrade this value by updating the “max_connections” MySQL variable for mysqld daemon.

8 Common errors

8.1 MySQL errors.

8.1.1 Max_allowed_packet error

If you encounter an error message with “max_allowed_packet” MySQL error, you must update your MySQL configuration to increase the maximum size of packet accepted by MySQL. We recommend setting the value to 4 MB.



Open the file “my.cnf” (usually available in “/etc” directory under Linux, in “C:\OCSinventoryNG\xampp\mysql\bin” under Windows) and add the line “max_allowed_packet=4M” in “[mysqld]” section.

```
[mysqld]
datadir=/var/lib/mysql
socket=/var/lib/mysql/mysql.sock
max_allowed_packet=4M

[mysql.server]
user=mysql
basedir=/var/lib

[safe_mysqld]
err-log=/var/log/mysqld.log
pid-file=/var/run/mysqld/mysqld.pid
```


Figure 9 : Sample my.cnf MySQL configuration file.

Then, restart MySQL server.

- ✓ /etc/rc.d/init.d/mysql restart

8.1.2 Client does not support authentication protocol.

If you encounter an error message with “Client does not support authentication protocol requested by server; consider upgrading MySQL client” MySQL error, you must enable support for old password storage method in your MySQL configuration.

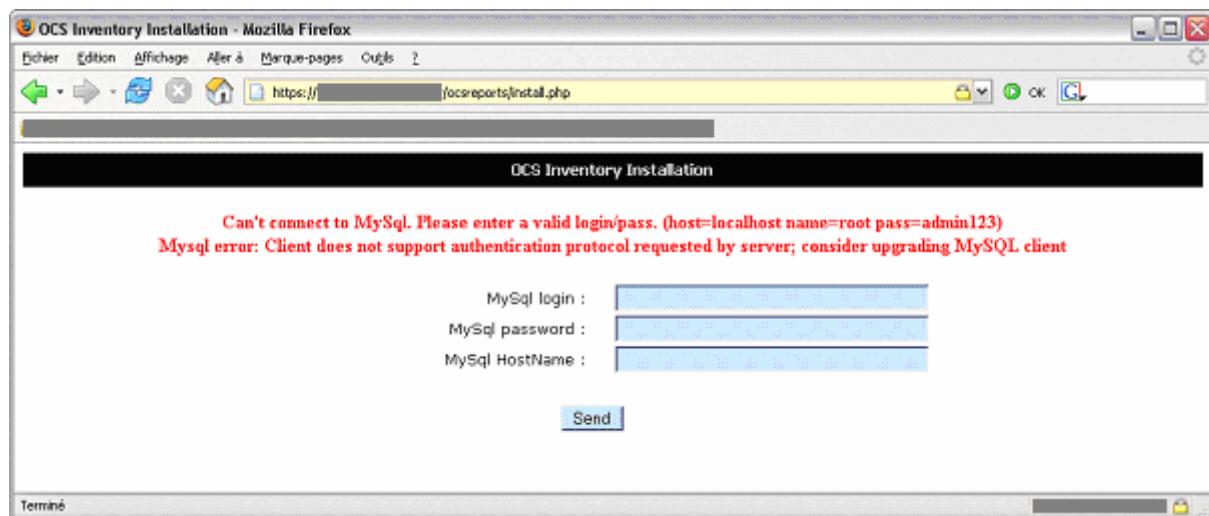

There is 2 way to do this.

1. Add directive “old-passwords” to the file “my.cnf” (usually in directory “/etc” under Linux and in “C:\OCSinventoryNG\xampp\mysql\bin” under Windows), in the section corresponding to your MySQL server.

```
# The MySQL server
[mysqld]
old-passwords
port      = 3306
socket    = mysql
```

Figure 10 : Sample my.cnf MySQL configuration file.

2. Add switch “--old-password” to the command line launching MySQL server.

Then, restart MySQL server.

- ✓ /etc/rc.d/init.d/mysql restart

Next, you may have to update ‘root’ password with the following commands:

- Connect to MySQL database “mysql -u root -p mysql” as root to update his password.
- Then, run the update statement “update user set password=OLD_PASSWORD('root_password') where user='root';”
- Once terminated, exit mysql command interpreter by entering “exit” command.

```
[root@linux root]# mysql -u root -p mysql
Enter password:
Reading table information for completion of table and column names
You can turn off this feature to get a quicker startup with -A

Welcome to the MySQL monitor. Commands end with ; or \g.
Your MySQL connection id is 19 to server version: 4.1.7-standard

Type 'help;' or '\h' for help. Type '\c' to clear the buffer.

mysql> update user set password=OLD_PASSWORD('admin123') where user='root';
Query OK, 1 row affected (0.00 sec)
Rows matched: 1  Changed: 1  Warnings: 0

mysql> exit
Bye
[root@linux root]#
```

Figure 11 : Sample MySQL root password update.

8.2 PHP errors

8.2.1 Requested content-length

If you see in apache error log (file error_log or ssl_error.log) message like following:

```
[Mon Sep 05 18:30:03 2005] [error] [client XXX.XXX.XXX.XXX] Requested content-length
of 831148 is larger than the configured limit of 524288, referer:
http://administration\_server/ocsreports/?multi=8
```

That's because Apache directive “LimitRequestBody” is used to limit size of HTTP requests.

To fix this, open Apache configuration file “httpd.conf”, usually in directory “/etc/httpd/conf” (under some distributions, Apache configuration for PHP may also resides in include directory, usually “/etc/httpd/conf.d”).

Find the directive “LimitRequestBody” and ensure that the size is at least 4 MB (4194304 bytes) and not the default 512 KB (524288 bytes).

```
#  
# PHP is an HTML-embedded scripting language which attempts to make it  
# easy for developers to write dynamically generated webpages.  
#  
LoadModule php4_module modules/libphp4.so  
  
#  
# Cause the PHP interpreter handle files with a .php extension.  
#  
<Files *.php>  
  SetOutputFilter PHP  
  SetInputFilter PHP  
  LimitRequestBody 4194304  
</Files>
```


Figure 12 : Sample Apache configuration for PHP.

Update this value if needed and restart Apache daemon.

- ✓ /etc/rc.d/init.d/httpd restart

8.2.2 ZIP support

When you point your browser to Administration Server URL "http://administration_server/ocsreports", you may encounter an error telling that ZIP for PHP is not installed.

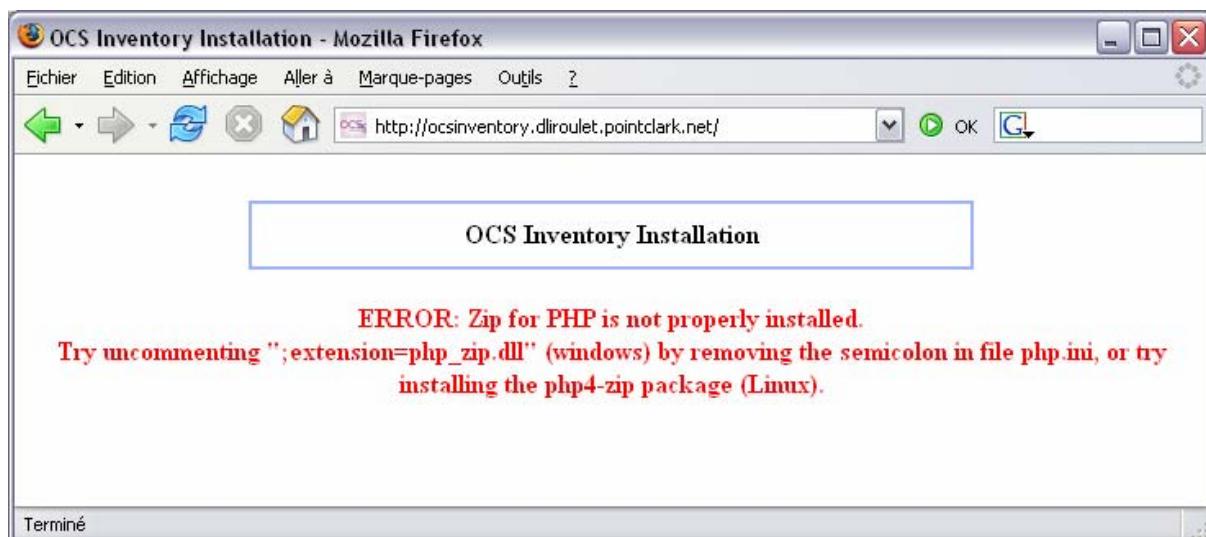

With OCS Inventory NG Server for Windows, you just have to open file “php.ini”, located in “C:\Windows” or “C:\WINNT” directory, with text editor and uncomment (i.e. remove semicolon) line “extension=php_zip.dll”. Then restart Apache2 service.

With OCS Inventory NG Server for Linux, check “php.ini” file located in “/etc” directory and uncomment (i.e. remove semicolon) line “extension=php_zip.so”. Then restart Apache daemon.

- ✓ /etc/rc.d/init.d/httpd restart

If you cannot find this extension, check PHP documentation (<http://www.php.net>) or forums to know how to enable/build ZIP support for your platform.

8.3 Apache web server

8.3.1 Files and directories permissions under Linux.

We assume that Apache web server is running under account “apache” and group “apache”, and that you’ve setup OCS Inventory NG management server as described previously:

- ✓ Administration server files are in directory “/var/www/html/ocsreports”
- ✓ Communication server files are in directory “/usr/local/ocsinventory-NG”
- ✓ Log for Communication server are in directory “/var/log/ocsinventory-NG”

Directory	File	Owner	Group	Permissions
/var/www/html/ocsreports		root	apache	-rwxrwxr-x
	dbconfig.inc.php	apache	apache	-rw-rw-r--
	subnet.csv	apache	apache	-rw-rw-r--
	All others	root	root	-rw-r--r--
/var/www/html/ocsreports/css		root	root	-rwxr-xr-x
	All files	root	root	-rw-r--r--
/var/www/html/ocsreports/files		root	root	-rwxr-xr-x
	All files	root	root	-rw-r--r--
/var/www/html/ocsreports/image		root	root	-rwxr-xr-x
	All files	root	root	-rw-r--r--
/var/www/html/ocsreports/languages		root	root	-rwxr-xr-x
	All files	root	root	-rw-r--r--
/usr/local/ocsinventory-NG		root	root	-rwxr-xr-x
	Ocsinventory_local.pl	root	root	-rwxr--r--
	All files	root	root	-rw-r--r--
/var/log/ocsinventory-NG		apache	apache	-rwxrwxr-x
	All files	apache	apache	-rw-rw-r--

If you’re using IPDISCOVER-UTIL perl script through the Administration server, it will automatically create one directory “ipd” under directory “/var/www/html/ocsreports”, which

are owned by user “apache” with group “apache”. If you encounter any problems, remove this directory, check permissions of “/var/www/html/ocsreports” directory and re-run utility through web administration server.